


2 0 2 1
KATALOG CATALOGUE



2 0 2 1
KATALOG CATALOGUE

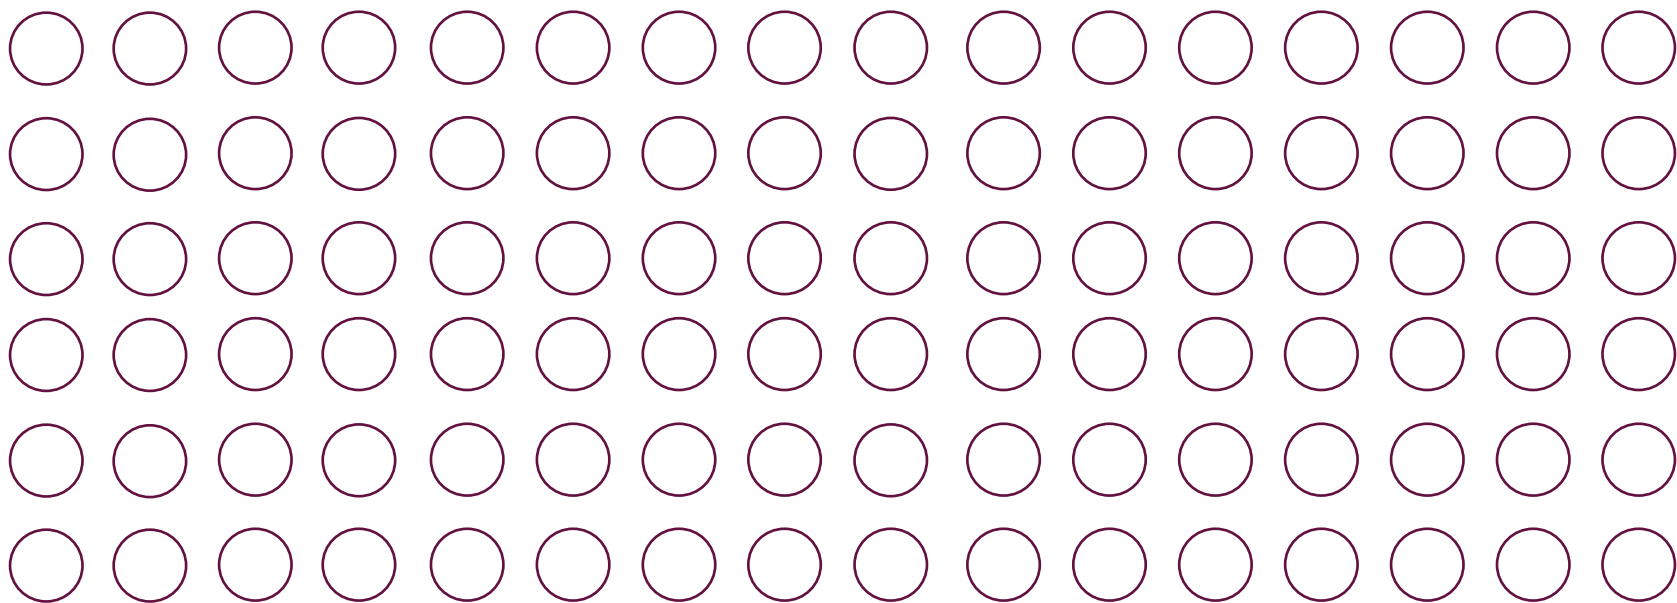

A	ARCTIC	128	J	JOY	100
B	BIANCA	158	K	KASHMIR KINGSTONE	110 118
B	BOTTICINO	90	L	LUXOR	24
C	CEMENT	18	L	LUXOR LAND LIMESTONE	86 61 150
	CHIC	51	M	MEMENTO	36
	CONGO	68	M	MERCURY MARFIL MAIOLICA	114 124 146
	CASTELLO	71	P	PIETRA	54
C	COMFORT	132	R	RAPOLANO	28
	CARRARA	136	S	STYLE	48
D	DOMUS	57	S	SNOW SMART	82 94
E	ELEGANT	104	V	VEGA VIA STRADA / ROTONDA	14 64
F	FORUM FEELING	32 44			
F	FUSION	154			
G	GLAM	76			
H	HARDROCK	40			
H	HABITAT	140			
J	JUPITER	8			



DRVO WOOD

CHIC	51
DOMUS	57
FEELING	44
STYLE	48



BETON CONCRETE

CEMENT	18
MEMENTO	36
MERCURY	114
SMART	94



MERMER MARBLE

BOTTICINO	90
CARRARA	136
ELEGANT	104
FUSION	154
LUXOR	24, 86
KASHMIR	110
KINGSTONE	118



MONOKOLORI MONOCOLORS

BIANCA	158
JOY	100
SNOW	82



KAMEN STONE

CASTELLO	71
CONGO	68
GLAM	76
HARDROCK	40
FORUM	32
JUPITER	8
LAND	61
LIMESTONE	150
PIETRA	54
RAPOLANO	28
VEGA	14
VIA STRADA / ROTONDA	64





RUSTIK RUSTIC

MAIOLICA	146
----------	------------



TEKSTIL TEXTILE

HABITAT	140
ARCTIC	128
COMFORT	132



RETT

RETT

JUPITER		•	•	
VEGA		•	•	
CEMENT		•	•	
LUXOR		•		
RAPOLANO			•	
FORUM			•	
MEMENTO			•	
HARDROCK			•	
FEELING			•	
STYLE				
CHIC				
PIETRA				
DOMUS				
LAND				
VIA STRADA / ROTONDA				
CONGO				
CASTELLO				
GLAM	•			
SNOW	•			
LUXOR	•	•		
BOTTICINO				•
SMART				•
JOY				•
ELEGANT				•
KASHMIR				
MERCURY				
KINGSTONE				
MARFIL				
ARCTIC				
COMFORT				
CARRARA				
HABITAT				
MAIOLICA				
LIMESTONE				
FUSION				
BIANCA				

15x60

25x50

45x45

33x33

				8
				14
				18
				24
				28
				32
				36
				40
•				44
•				48
•				51
				54
		•		57
		•		61
				64
				68
				71
		•		76
				82
				86, 24
				90
				94
				100
				104
	•			110
	•			114
	•			118
	•	•		124
	•			128
	•			132
	•			136
	•	•		140
	•			146
	•			150
	•			154
	•			158



- 8. JUPITER
- 14. VEGA
- 18. CEMENT
- 24. LUXOR
- 28. RAPOLANO
- 33. FORUM
- 36. MEMENTO
- 40. HARDROCK
- 44. FEELING
- 48. STYLE
- 51. CHIC
- 54. PIETRA
- 57. DOMUS
- 61. LAND
- 64. VIA STRADA / ROTONDA
- 68. CONGO
- 71. CASTELLO

gres porcelain

SQUARE AFFAIR




POD | FLOOR: CEMENT LIMESTONE 59x59 RETT



ZID | WALL: JUPITER ICE 29,5x59 RETT
JUPITER DARK 29,5x59 RETT
POD | FLOOR: JUPITER R DARK 59x59 RETT



SPOLJNA UNUTRAŠNJA
OUTDOOR INDOOR

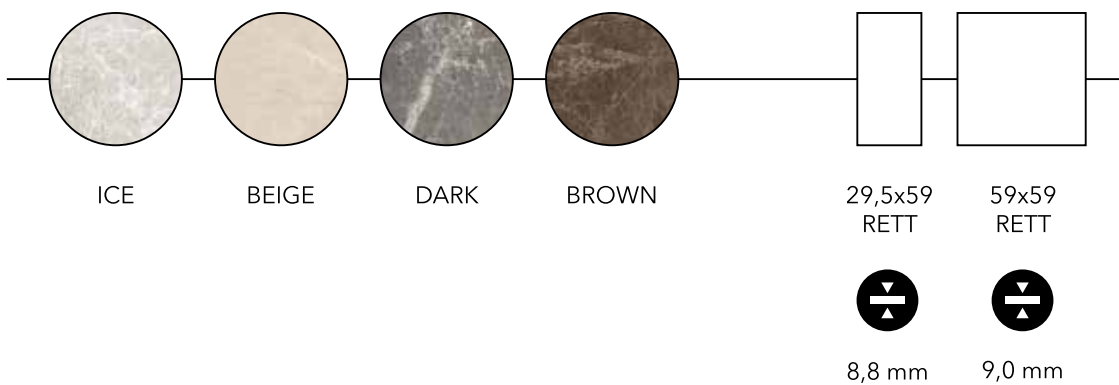

jupiter

RECTIFIED GRES PORCELAIN

Bogata grafika kamena prenesena je na seriju Jupiter. Uz neverovatne detalje, odlikuju je i četiri pažljivo odabrane boje koje se mogu uklapati u najrazličitije ambijente i stilove. Za koju god boju da se opredelite, pločice iz ove serije prostori pružaju raskošan izgled.


Rich stone graphics is transferred to Jupiter series. In addition to incredible details, it is characterized by four carefully selected colors that can fit into a variety of ambiences and styles. Whatever color you choose, the tiles from this series provide your rooms a luxurious look.

SQUARE AFFAIR



① POD | FLOOR: JUPITER R BEIGE 59x59 RETT





DIN 51097 DIN 51130



PEI 4

12

JUPITER ICE 29,5x59 cm **RETT** / FT/WT



PEI 4

12

JUPITER BEIGE 29,5x59 cm **RETT** / FT/WT



PEI 3

12

JUPITER DARK 29,5x59 cm **RETT** / FT/WT







PEI 3

12

JUPITER BROWN 29,5x59 cm **RETT** / FT/WT

SLOGOVI / PATTERNS



PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
							WT WALL TILES / ZIDNE PLOČICE M ²	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
29,5x59	0,17405	6	1,044	20,94	50,112	1030,00	FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
59x59	0,3481	4	1,392	26,92	41,760	840,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



DIN 51097 DIN 51130



PEI 4

8

JUPITER R ICE 59x59 cm RETT / FT

PEI 4

8

JUPITER R BEIGE 59x59 cm RETT / FT



PEI 3

8

JUPITER R DARK 59x59 cm RETT / FT

PEI 3

8

JUPITER R BROWN 59x59 cm RETT / FT

- JUPITER BEIGE 29,5x59 cm RETT / FT/WT**
- JUPITER BROWN 29,5x59 cm RETT / FT/WT**
- JUPITER R BEIGE 59x59 cm RETT / FT**
- JUPITER R BROWN 59x59 cm RETT / FT**




NOVO
NEW



POD | FLOOR: VEGA 59x59 RETT



SPOLJNA UNUTRAŠNJA
OUTDOOR INDOOR

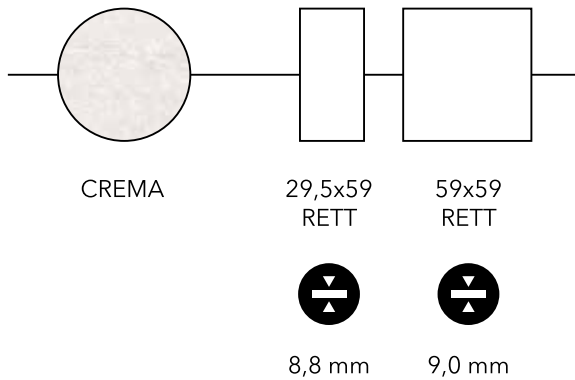

vega

RECTIFIED GRES PORCELAIN

Mirni tonovi i suptilni detalji grafike čine seriju Vega idealnim izborom za sve ljubitelje minimalizma. Zahvaljujući neutralnim bojama, ova pločica prostoru daje čist i uredan izgled, zbog čega je veoma lako uklapati nameštaj i različite boje detalja uz nju.





The calm tones and subtle details of the graphics make the Vega series an ideal choice for all lovers of minimalism. Thanks to the neutral colors, this tile gives the space a clean and tidy look, which makes it very easy to fit furniture and different colors of details along with it.

SQUARE AFFAIR











ZID | WALL: VEGA CREMA 29,5x59 RETT
VEGA DESERT 29,5x59 RETT

SLOGOVI / PATTERNS



PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
							WT WALL TILES / ZIDNE PLOČICE M ²	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
29,5x59	0,17405	6	1,044	20,94	50,112	1030,00	FT FLOOR TILES / PODNE PLOČICE M ²	
59x59	0,3481	4	1,392	26,92	41,760	840,00	LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
							RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



DIN 51097 DIN 51130



PEI
4

12

VEGA CREMA 29,5x59 cm **RETT** / FT/WT



PEI
4

4

VEGA DESERT 29,5x59 cm **RETT** / FT/WT



DIN 51097 DIN 51130



PEI
4

6


VEGA CREMA 59x59 cm **RETT** / FT




POD | FLOOR: CEMENT SMOKE 59x59 RETT




SPOLJNA UNUTRAŠNJA
OUTDOOR INDOOR




BEIGE



BONE




SMOKE



LIMESTONE



29,5x59
RETT



59x59
RETT



8,8 mm



9,0 mm

cement

RECTIFIED GRES PORCELAIN


Već nekoliko godina apsolutni favorit u opremanju enterijera je reprodukcija betona, idealno preneti na seriju Cement. Boje su izabrane tako da će vašem prostoru pružiti osećaj topline, čak i ako se odlučite za industrijski stil opremanja enterijera.

For several years now, the absolute favorite in interior design has been the reproduction of concrete, ideally transferred to the Cement series. The colors are chosen so that they will give your space a feeling of warmth, even if you opt for an industrial style of interior design.

SQUARE AFFAIR



① ZID | WALL: CEMENT LIMESTONE 29,5x59 RETT
FEELING ANTICO 29,5x59 RETT
POD | FLOOR: CEMENT LIMESTONE 59x59 RETT



DIN 51097 DIN 51130



PEI 4

8

CEMENT BONE 29,5x59 cm **RETT** / FT/WT



PEI 4

8

CEMENT BEIGE 29,5x59 cm **RETT** / FT/WT



PEI 3

8

CEMENT SMOKE 29,5x59 cm **RETT** / FT/WT



PEI 4

8

CEMENT LIMESTONE 29,5x59 cm **RETT** / FT/WT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
							WT WALL TILES / ZIDNE PLOČICE M ²	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
29,5x59	0,17405	6	1,044	20,94	50,112	1030,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	
59x59	0,3481	4	1,392	26,92	41,760	840,00		



⤴ POD | FLOOR: CEMENT BONE 59x59 RETT



DIN 51097 DIN 51130



PEI 4
8

CEMENT BONE RETT 59x59 cm / FT



PEI 4
8

CEMENT BEIGE RETT 59x59 cm / FT



↑

PEI 3
8

CEMENT SMOKE RETT 59x59 cm / FT



PEI 4
8


CEMENT LIMESTONE RETT 59x59 cm / FT



POD | FLOOR: LUXOR 59x59 RETT



SPOLJNA UNUTRAŠNJA
OUTDOOR INDOOR



LUXOR

59x59
RETT



9,0 mm

luxor

RECTIFIED GRES PORCELAIN

Mermer kao večita inspiracija za opremanje enterijera. Seriju Luxor čine detalji crnog mermera sa modernim i upadljivim venama. Odličan je izbor za postizanje efekta raskoši i vanvremenske elegancije.

Marble as an eternal inspiration for interior design. The Luxor series consists of a details of black marble with modern and striking veins. It is an excellent choice for achieving the effect of luxury and timeless elegance.


SQUARE AFFAIR



① POD | FLOOR: LUXOR 59x59 RETT



DIN 51097 DIN 51130

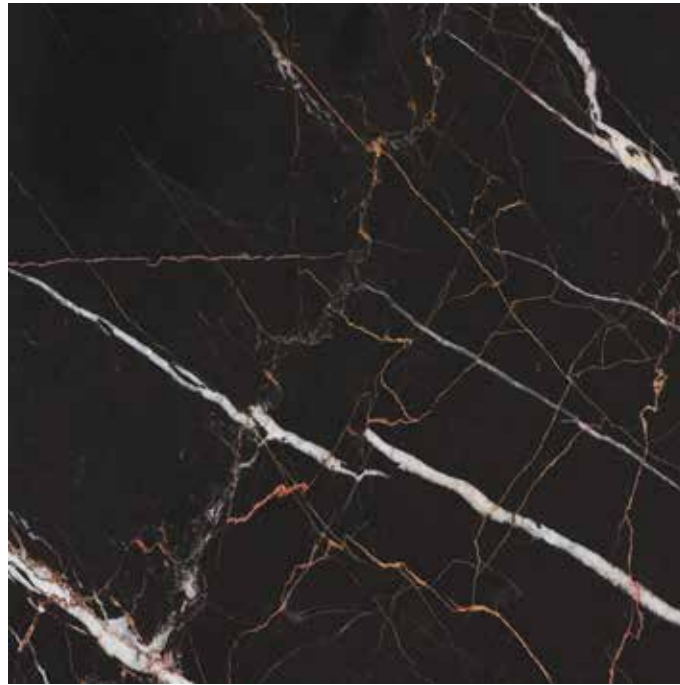

PEI
2

6

LUXOR 59x59 cm **RETT** / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
59x59	0,3481	4	1,392	26,92	41,760	840,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



POD | FLOOR: RAPOLANO TRASTEVERE 29,5x59 RETT




SPOLJNA
OUTDOOR



UNUTRAŠNJA
INDOOR



NOVO
NEW

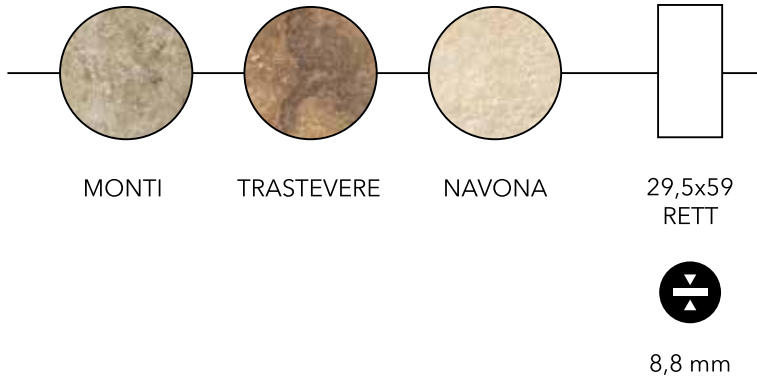

rapolano

RECTIFIED GRES PORCELAIN

Pločice serije Rapolano odlikuje bogatstvo detalja mediteranskog kamena. Tople nijanse upotpunjuju osećaj udobnosti, zbog čega je ova serija dobar izbor za letnjikovce, bašte i terase. Savršeno se slaže uz rustične detalje i stil opremanja.

The tiles of the Rapolano series are characterized by a wealth of details of Mediterranean stone. Warm shades complete the feeling of comfort, which is why this series is a good choice for summer houses, gardens and terraces. It goes perfectly with rustic details and style of furnishing.

SQUARE AFFAIR



① POD | FLOOR: RAPOLANO MONTI 29,5x59 RETT



NOVO
NEW



DIN
51097



DIN
51130



PEI
4

8

RAPOLANO MONTI 29,5x59 cm RETT / FT



PEI
4

8

RAPOLANO NAVONA 29,5x59 cm RETT / FT



PEI
3

8

RAPOLANO TRASTEVERE 29,5x59 cm RETT / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION		PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT	FT	
							WT	WALL TILES / ZIDNE PLOČICE M ²	
							FT	FLOOR TILES / PODNE PLOČICE M ²	
							LI	LISTELA KOM / PC	
							IN	INSERT KOM / PC	
29,5x59	0,17405	6	1,044	20,94	50,112	1030,00	RETT	REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



POD | FLOOR: FORUM TAUPE 29,5x59 RETT



SPOLJNA
OUTDOOR

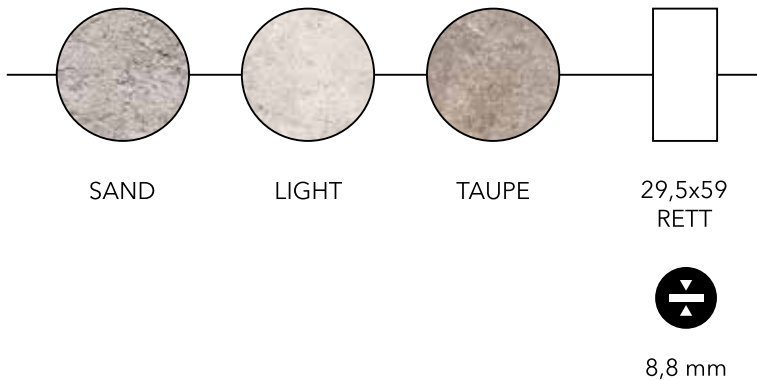

forum

RECTIFIED GRES PORCELAIN

Stari, pohabani kamen postao je imperativ u opremanju enterijera. Njegova lepota je u mogućnosti kombinovanja sa različitim stilovima. I ako je reč o imitaciji kamena, pažljiv odabir boja pločica serije Forum za krajnji rezultat pruža efekat vanvremenske topline.

Old, shabby stone has become an imperative in interior design. Its beauty is in possibility to be combined with different styles. And when it comes to the imitation of stone, careful selection of tile colors of the Forum series for the end result provides the effect of timeless warmth.

SQUARE AFFAIR



Ⓢ POD | FLOOR: FORUM SAND 29,5x59 RETT



DIN 51097 DIN 51130



PEI 4
8

FORUM LIGHT 29,5x59 cm RETT / FT



PEI 4
8

FORUM SAND 29,5x59 cm RETT / FT



PEI 4
8

FORUM TAUPE 29,5x59 cm RETT / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
29,5x59	0,17405	6	1,044	20,94	50,112	1030,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



ZID | WALL: MEMENTO ICE 29,5x59 RETT
MEMENTO DARK 29,5x59 RETT
POD | FLOOR: MEMENTO DARK 29,5x59 RETT



SPOLJNA UNUTRAŠNJA
OUTDOOR INDOOR

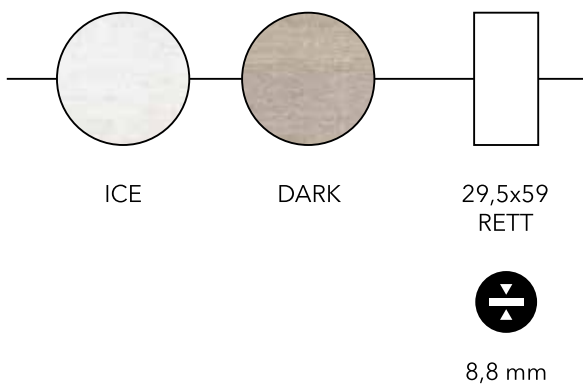

memento

RECTIFIED GRES PORCELAIN


Reprodukcija stilizovanog kamena u kombinaciji sa nežnim i neutralnim tonovima čini seriju Memento favoritom među projektnim pločicama. Zbog svog suptilnog dizajna i detalja, može se kombinovati sa najrazličitijim stilovima opremanja. Savršen je izbor za ljubitelje minimalizma i pročišćenih linija.

The reproduction of stylized stone in combination with gentle and neutral tones makes the Memento series a favorite among project tiles. Due to its subtle design and details, it can be combined with a variety of furnishing styles. It is a perfect choice for fans of minimalism and refined lines.

SQUARE AFFAIR



⤴ POD | FLOOR: MEMENTO ICE 29,5x59 RETT



PEI 4

8

MEMENTO ICE 29,5x59 cm **RETT** / FT/WT



PEI 3

8

MEMENTO DARK 29,5x59 cm **RETT** / FT/WT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
29,5x59	0,17405	6	1,044	20,94	50,112	1030,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	



POD | FLOOR: HARDROCK TERRA 29,5x59 RETT



SPOLJNA
OUTDOOR

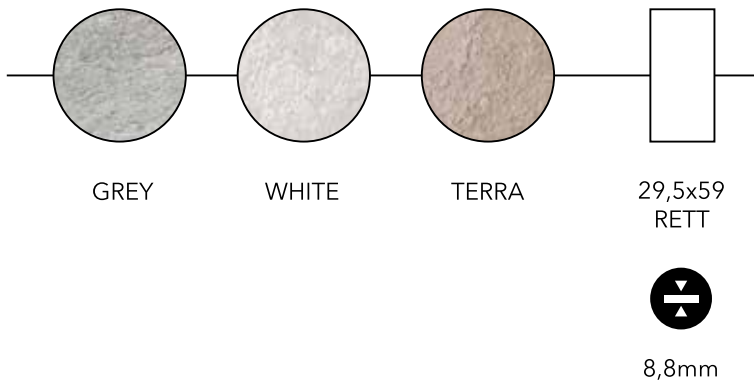

hardrock

RECTIFIED GRES PORCELAIN

Topli tonovi zemlje i peska odlika su serije Hardrock. Ova pločica za spoljnu upotrebu idealna je za bašte, terase i stepeništa. Zahvaljujući lepoti detalja, za koju god boju da se odlučite vaša mala oaza mira dobiće prefinjen izgled mediteranskog stila.

Warm tones of soil and sand are the hallmarks of the Hardrock series. This tile for outdoor use is ideal for gardens, terraces and staircases. Thanks to the beauty of the details, whatever color you choose, your little oasis of peace will get a refined look of the Mediterranean style.

SQUARE AFFAIR



⤴ POD | FLOOR: HARDROCK WHITE 29,5x59 RETT



PEI
4

8

HARDROCK WHITE 29,5x59 cm **RETT** / FT



PEI
4

8

HARDROCK TERRA 29,5x59 cm **RETT** / FT



PEI
4

8

HARDROCK GREY 29,5x59 cm **RETT** / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
29,5x59	0,17405	6	1,044	20,94	50,112	1030,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



POD | FLOOR: FEELING BEIGE 29,5x59 RETT



SPOLJNA UNUTRAŠNJA
OUTDOOR INDOOR

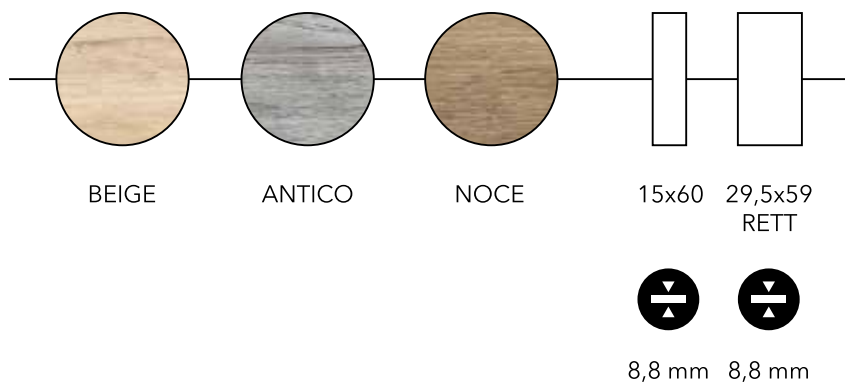

feeling

RECTIFIED GRES PORCELAIN

Dekor drveta kao večna elegancija. Svi detalji i umeren reljef drveta preneti su na seriju Feeling. Tri boje u okviru ove serije odabrane su tako da se uklapaju dobro uz rustični, skandinavski ili minimalistički stil opremanja. Odabirom ove serije sigurno ćete postići efekat elegancije i topline u svom prostoru.

Wood decor as eternal elegance. All the details and moderate relief of the wood have been transferred to the Feeling series. The three colors within this series have been chosen to fit well with the rustic, Scandinavian or minimalist style of furnishing. By choosing this series, you will surely achieve the effect of elegance and warmth in your space.

SQUARE AFFAIR



① POD | FLOOR: FEELING NOCE 15x60



DIN 51097 DIN 51130



PEI 4
8

FEELING BEIGE 29,5x59 cm RETT / FT



PEI 4
12

FEELING BEIGE 15x60 cm / FT



PEI 4
12

FEELING ANTICO 15x60 cm / FT



PEI 4
8

FEELING ANTICO 29,5x59 cm RETT / FT



PEI 4
12

FEELING NOCE 15x60 cm / FT



PEI 4
8

FEELING NOCE 29,5x59 cm RETT / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
							WT WALL TILES / ZIDNE PLOČICE M ²	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
15x60	0,0900	11	0,990	19,36	55,440	1110,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	
29,5x59	0,17405	6	1,044	20,94	50,112	1030,00		



POD | FLOOR: STYLE GREY 15x60



SPOLJNA UNUTRAŠNJA
OUTDOOR INDOOR

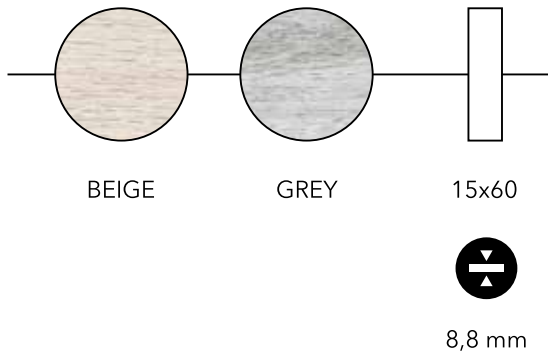

style

GRES PORCELAIN

Još jedna prelepa reprodukcija drveta prenet na seriju Style. Ovu seriju odlikuju dve nežne boje odabrane tako da se mogu uklapati uz najrazličitije stilove opremanja enterijera.

Another beautiful reproduction of wood transferred to the Style series. This series is characterized by two delicate colors selected so that they can fit into a variety of interior design styles.

SQUARE AFFAIR



DIN 51097 DIN 51130

PEI 4

7



STYLE BEIGE 15x60 cm / FT

PEI 4

7



STYLE GREY 15x60 cm / FT




POD | FLOOR: STYLE BEIGE 15x60

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
							WT WALL TILES / ZIDNE PLOČICE M ²	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
15x60	0,0900	11	0,990	19,36	55,440	1110,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



SPOLJNA UNUTRAŠNJA
OUTDOOR INDOOR



CHIC

15x60



8,8 mm

chic

GRES PORCELAIN

Seriya Chic je apsolutni favorit kupaca. Nju odlikuje samo jedna osnovna boja pločice i deset potpuno različitih lica imitacije detalja rustičnog drveta. Zahvaljujući bogatstvu detalja, reljefa i varijaciji toplih tonova, ova serija svakoj prostoriji pruža efekat raskoši i topline.

The Chic series is an absolute favorite of customers. It is characterized by only one basic color of the tile and ten completely different faces with imitation of rustic wood details. Thanks to the richness of details, relief and variation of tones, this series gives each room an effect of luxury and warmth.

SQUARE AFFAIR



↑ POD | FLOOR: CHIC 15x60



DIN 51097 DIN 51130

PEI
4

10



CHIC 15x60 cm / FT



PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
							WT WALL TILES / ZIDNE PLOČICE M ²	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
15x60	0,0900	11	0,990	19,36	55,440	1110,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



POD | FLOOR: PIETRA LIGHT GREY 45x45



SPOLJNA
OUTDOOR

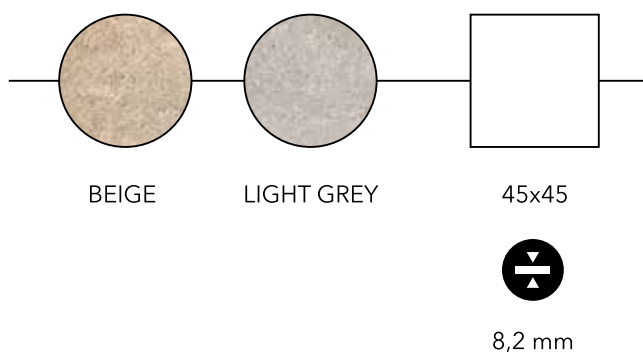

pietra

GRES PORCELAIN

Dekor pustinjskog kamena odlikuje seriju Pietra. Uz atraktivnu dimenziju, serija je bogata i toplim zemljanim tonovima i pažljivo prenetim detaljima kamena, zbog čega je omiljen izbor za popločavanje spoljnih stepeništa, balkona i terasa.

The desert stone decor features the Pietra series. In addition to the attractive dimension, the series full of warm earth tones and carefully conveyed all the details of the stone, which is why it is a favorite choice for paving external stairs, balconies and terraces.

SQUARE AFFAIR



DIN 51097 DIN 51130



PEI
4

7

PIETRA BEIGE 45X45 cm / FT



PEI
4

7


PIETRA LIGHT GREY 45X45 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
45x45	0,2025	5	1,012	17,55	66,792	1180,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	



SPOLJNA UNUTRAŠNJA
OUTDOOR INDOOR

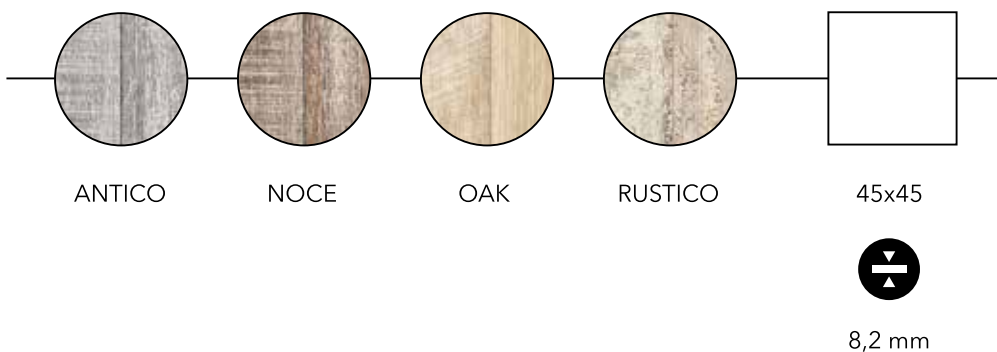

domus

GRES PORCELAIN

Seriya Domus je jedna od najstarijih reprodukcija drveta u asortimanu Square Affair. Rustično, pohabano drvo sa neverovatno realnim detaljima čini je omiljenom među podnim pločicama. Četiri boje u okviru ove serije omogućavaju kombinovanje uz različite stilove, bilo da ste ljubitelj minimalizma, boho chic-a ili rustike.

The Domus series is one of the oldest wood reproductions in the Square Affair range. Rustic, worn wood with incredibly realistic details makes it a favorite among floor tiles. The four colors within this series allow you to combine with different styles, whether you are a fan of minimalism, boho chic or rustic.

SQUARE AFFAIR



⬆️ POD | FLOOR: DOMUS OAK 45x45



DIN 51097 DIN 51130



PEI 4

2

DOMUS ANTICO 45X45 cm / FT



PEI 4

2

DOMUS NOCE 45X45 cm / FT



PEI 4

5

DOMUS OAK 45X45 cm / FT



PEI 4

5

DOMUS RUSTICO 45X45 cm / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
45x45	0,2025	5	1,012	17,55	66,792	1180,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



⤴ POD | FLOOR: DOMUS ANTICO 45x45



SPOLJNA
OUTDOOR

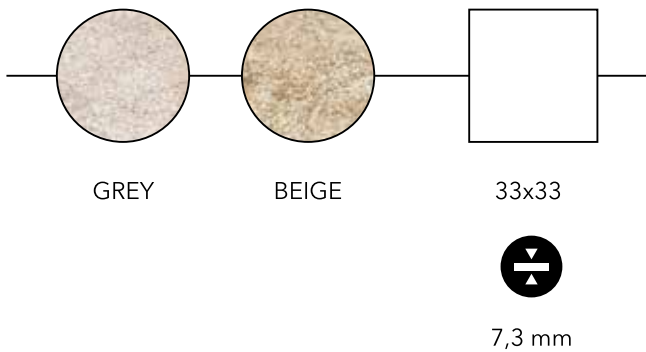

land

GRES PORCELAIN

Još jedna imitacija kamena i zemljani tonovi čine seriju Land. Tople nijanse idealne su za postizanje efekta mediteranskog stila opremanja.

Another imitation of stone and earth tones make up the Land series. Warm shades are ideal for achieving the effect of a Mediterranean style of furnishing.

SQUARE AFFAIR



① POD | FLOOR: LAND BEIGE 33x33



DIN 51097 DIN 51130



PEI 4

5

LAND GREY 33x33 cm / FT



PEI 4

5

LAND BEIGE 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
33x33	0,1089	16	1,742	26,56	73,164	1140,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	



POD | FLOOR: VIA STRADA BEIGE 33x33



SPOLJNA
OUTDOOR




BEIGE



GRIGIO



RIMINI



33x33



7,3 mm

via strada via rotonda

GRES PORCELAIN

Via Strada i Via Rotonda su pločice sa savršeno prenetim detaljima mozaika od kamena. Bogatstvo detalja i reljefa zaslužno je za veoma realističan izgled dekora. Ove dve serije odlično se uklapaju uz rustični stil, pa tako ne čudi što su upravo one prvi izbor kupaca za opremanje vikendica i planinskih kuća.

Via Strada and Via Rotonda are tiles with a perfectly transferred details of stone mosaics. The richness of details and relief is responsible for the very realistic look of the decor. These two series fit perfectly with the rustic style, so it is not surprising that they are the first choice of buyers for furnishing cottages and mountain houses.

SQUARE AFFAIR



POD | FLOOR: VIA STRADA RIMINI 33x33



POD | FLOOR: VIA ROTONDA GRIGIO 33x33





DIN 51097 DIN 51130



PEI 4
4

VIA STRADA BEIGE 33x33 cm / FT



PEI 4
4

VIA ROTONDA BEIGE 33x33 cm / FT



PEI 4
4

VIA STRADA GRIGIO 33x33 cm / FT



PEI 4
4

VIA ROTONDA GRIGIO 33x33 cm / FT



PEI 4
4

VIA STRADA RIMINI 33x33 cm / FT



PEI 4
4

VIA ROTONDA RIMINI 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
33x33	0,1089	16	1,742	26,56	73,164	1140,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	



POD | FLOOR: CONGO MARRONE 33x33




SPOLJNA
OUTDOOR



MARRONE



NERO



33x33



7,3 mm

congo

GRES PORCELAIN

Ovu šarenoliku seriju odlikuju kamenčići u različitim bojama, kao i reljef koji doprinosi realističnosti dekora. Savršena je za baštenske stazice, balkone i terase.

This colorful series is characterized by little stones in different colors, as well as a relief that contributes to the realism of the decor. It is perfect for garden paths, balconies and terraces.

SQUARE AFFAIR




DIN 51097 DIN 51130



PEI 4

4

CONGO MARRONE 33x33 cm / FT

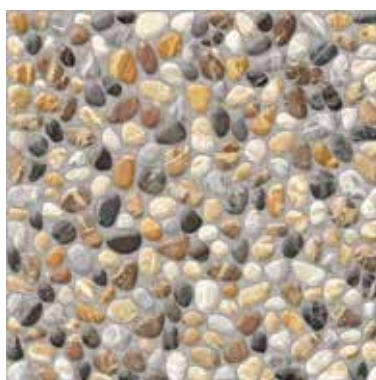

PEI 4

4


CONGO NERO 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
33x33	0,1089	16	1,742	26,56	73,164	1140,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	



SPOLJNA
OUTDOOR

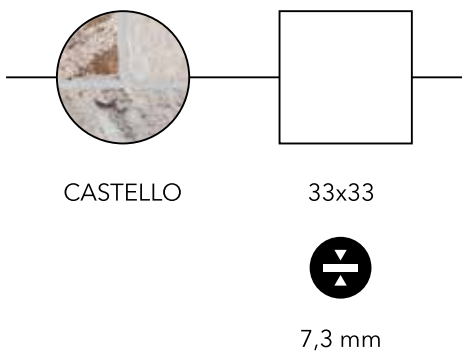

castello

GRES PORCELAIN

Reprodukcija mozaika od lomljenog kamena, pažljiv odabir nijansi i detalja čini ovu seriju favoritom za popločavanje stepeništa, staza i prilaza. Kako i samo ime kaže, bogat dekor serije Castello doprinosi postizanju efekta nekih starijih, antičkih vremena, pa je zbog toga pločica koja odoleva promeni trendova i ostaje klasika dugi niz godina.

Reproduction of crushed stone mosaics, careful selection of shades and details make this series a favorite for paving stairs, paths and approaches. As the name suggests, the rich decor of the Castello series contributes to the effect of some older, ancient times, which is why the tile is resistant to changing trends and remains a classic for many years.

SQUARE AFFAIR



POD | FLOOR: CASTELLO 33x33



DIN 51097 DIN 51130



PEI
4

4

CASTELLO 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
33x33	0,1089	16	1,742	26,56	73,164	1140,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	

- 
- 76. GLAM
 - 82. SNOW
 - 86. LUXOR
 - 90. BOTTICINO
 - 94. SMART
 - 100. JOY
 - 104. ELEGANT
 - 110. KASHMIR
 - 114. MERCURY
 - 118. KINGSTONE
 - 124. MARFIL
 - 128. ARCTIC
 - 132. COMFORT
 - 136. CARRARA
 - 140. HABITAT
 - 146. MAIOLICA
 - 150. LIMESTONE
 - 154. FUSION
 - 158. BIANCA

zidne pločice wall tiles

SQUARE AFFAIR




ZID | WALL: CEMENT BEIGE 29,5x59 RETT



ZID | WALL: GLAM ICE 25x75
GLAM CAPPUCCINO 25x75
GLAM ART CAPPUCCINO 25x75
POD | FLOOR: GLAM CAPPUCCINO 45x45



UNUTRAŠNJA
INDOOR

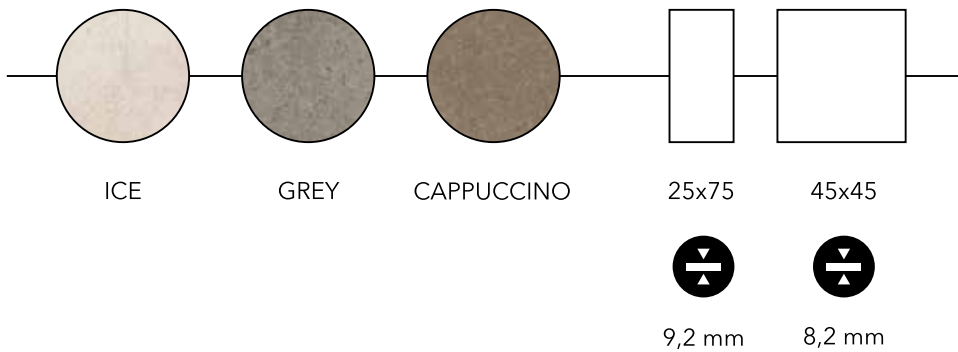

glam

Zemljani tonovi serije Glam daju dodatnu notu elegancije ovoj imitaciji kamena. Nežne vene i pukotine doprinose realističnosti dekora, zbog čega je ova pločica pravi izbor za ljubitelje luksuza.

The earthy tones of the Glam series give an extra note of elegance to this stone imitation. Gentle veins and cracks contribute to the realism of the decor, which is why this tile is the right choice for luxury lovers.

SQUARE AFFAIR



① ZID | WALL: GLAM ICE 25x75
GLAM GREY 25x75
GLAM ART GREY 25x75
POD | FLOOR: GLAM GREY 45x45

12



GLAM ICE 25x75 cm / WT

12



GLAM GREY 25x75 cm / WT

12



GLAM CAPPUCCINO 25x75 cm / WT



12

GLAM MOSAIC 3D ICE 25x75 cm / WT



6

GLAM ART GREY 25x75 cm / WT



6

GLAM ART CAPPUCCINO 25x75 cm / WT



DIN 51097 DIN 51130



PEI
3

12

GLAM GREY 45x45 cm / FT



PEI
3

12

GLAM CAPPUCCINO 45x45 cm / FT

PAKOVANJE / PACKAGING



FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
25x75	0,1875	6	1,125	16,80	60,750	940,00	IN INSERT KOM / PC	
45x45	0,2025	5	1,012	17,55	66,792	1180,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



ZID | WALL: SNOW 25x75
SNOW MOSAIC 3D 25x75
POD | FLOOR: FEELING ANTICO 29,5x59 RETT



UNUTRAŠNJA
INDOOR

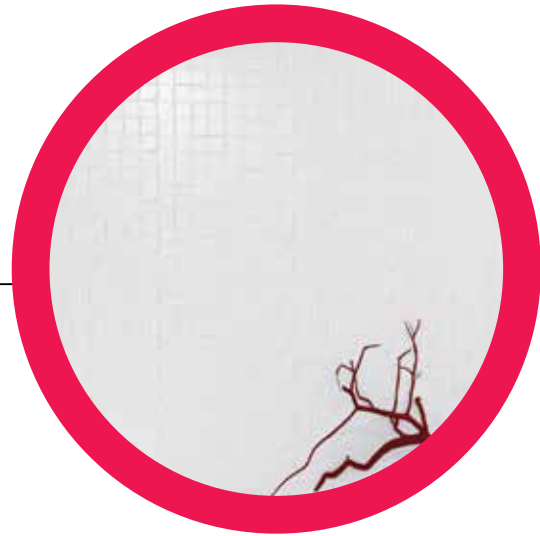

SNOW

25x75




9,2 mm

SNOW

Snežno bela pločica, savršena za uklapanje uz svaki stil opremanja enterijera. Serija ima i reljefni dekor imitacije mozaika, koji daje razigranost ovoj jednostavnoj seriji.


Snow white tile, perfect for fitting into any style of interior design. The series also has a relief mosaic imitation decor, which gives playfulness to this simple series.

SQUARE AFFAIR

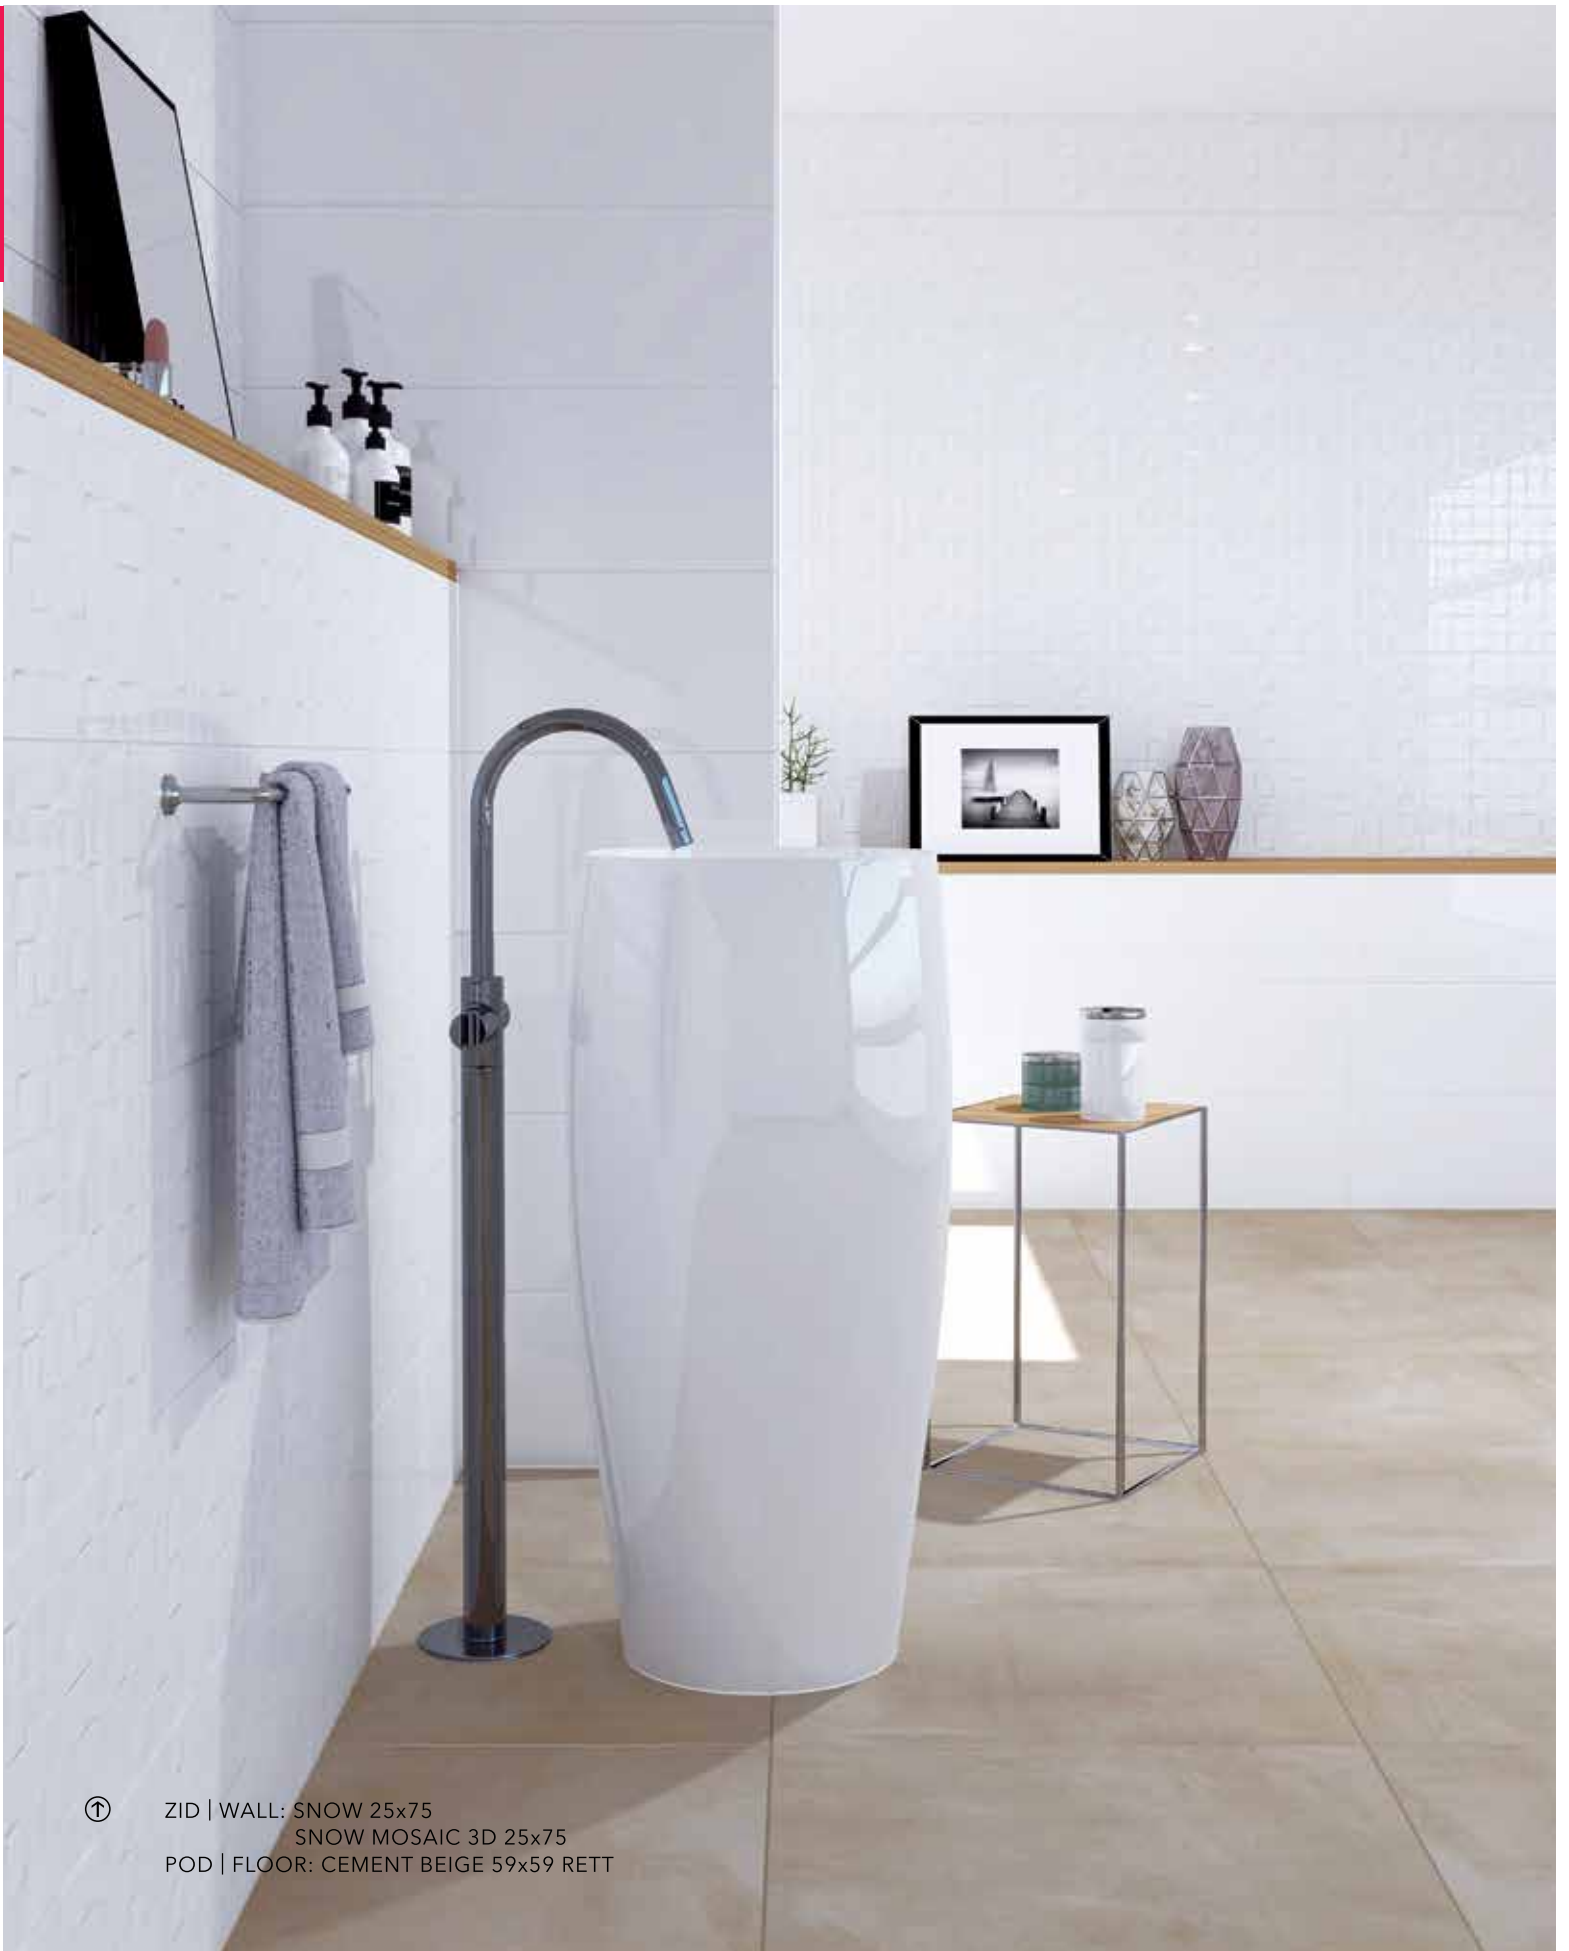

⌚ ZID | WALL: SNOW 25x75
SNOW MOSAIC 3D 25x75
POD | FLOOR: CEMENT BEIGE 59x59 RETT








1

**SNOW** 25x75 cm / WT

1

**SNOW MOSAIC 3D** 25x75 cm / WT**SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:****CHIC** 15x60 cm - na strani / see page 51**FEELING** 29,5x59 cm rett, 15x60 cm - na strani / see page 44**STYLE** 15x60 cm - na strani / see page 48**LUXOR** 59x59 rett cm - na strani / see 24 page 42

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
25x75	0,1875	6	1,125	16,80	60,750	940,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



ZID | WALL: LUXOR WHITE 25x75
LUXOR MOSAIC 3D WHITE 25x75



UNUTRAŠNJA
INDOOR

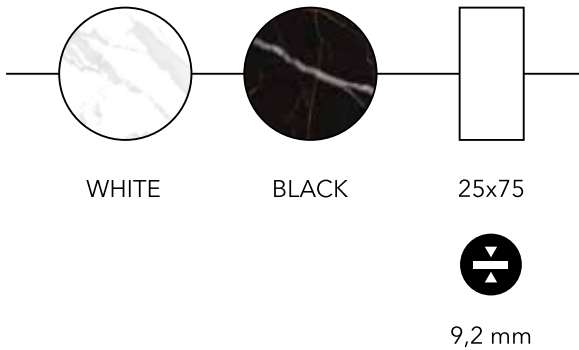

luxor

Mermer kao večita inspiracija za opremanje enterijera. Seriju Luxor čine detalji mermera sa modernim i upadljivim venama. Odličan je izbor za postizanje efekta raskoši i vanvremenske elegancije.

Marble as an eternal inspiration for interior design. The Luxor series consists of a details of marble with modern and striking veins. It is an excellent choice for achieving the effect of luxury and timeless elegance.


SQUARE AFFAIR



⌚ ZID | WALL: LUXOR WHITE 25x75
LUXOR BLACK 25x75
POD | FLOOR: LUXOR 59x59 RETT



8

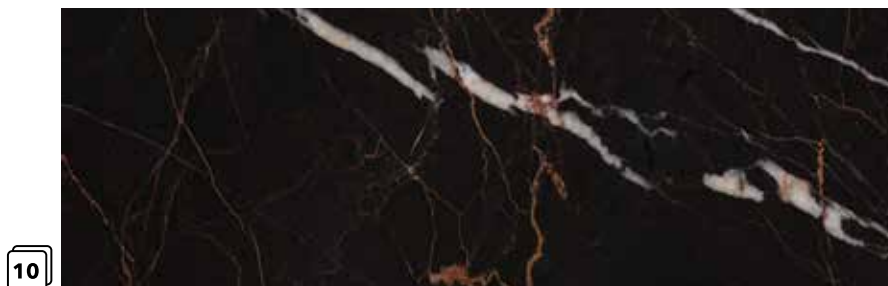LUXOR WHITE 25x75 cm / WT

10

LUXOR BLACK 25x75 cm / WT








6

LUXOR MOSAIC 3D WHITE 25x75 cm / WT

SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:

LUXOR 59x59 cm rett - na strani / see page 24

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
25x75	0,1875	6	1,125	16,80	60,750	940,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	




ZID | WALL: BOTTICINO 20x60
BOTTICINO DIAMONDS 20x60
POD | FLOOR: BOTTICINO 45x45



UNUTRAŠNJA
INDOOR



NOVO
NEW

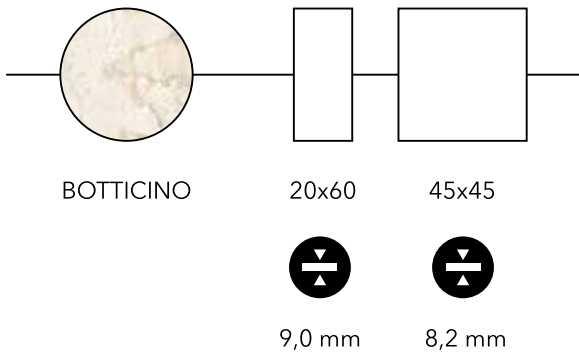


botticino

Seriya zidnih pločica Botticino predstavlja imitaciju raskošnoga kamena. Bogati dekori sa mnoštvom detalja čine ovu seriju idealnim izborom za sve koji vole efekat luksuza i klasike.

The Botticino series of wall tiles is a imitation of luxurious stone. Rich decors with many details make this series an ideal choice for everyone who loves the effect of luxury and classics.

SQUARE AFFAIR

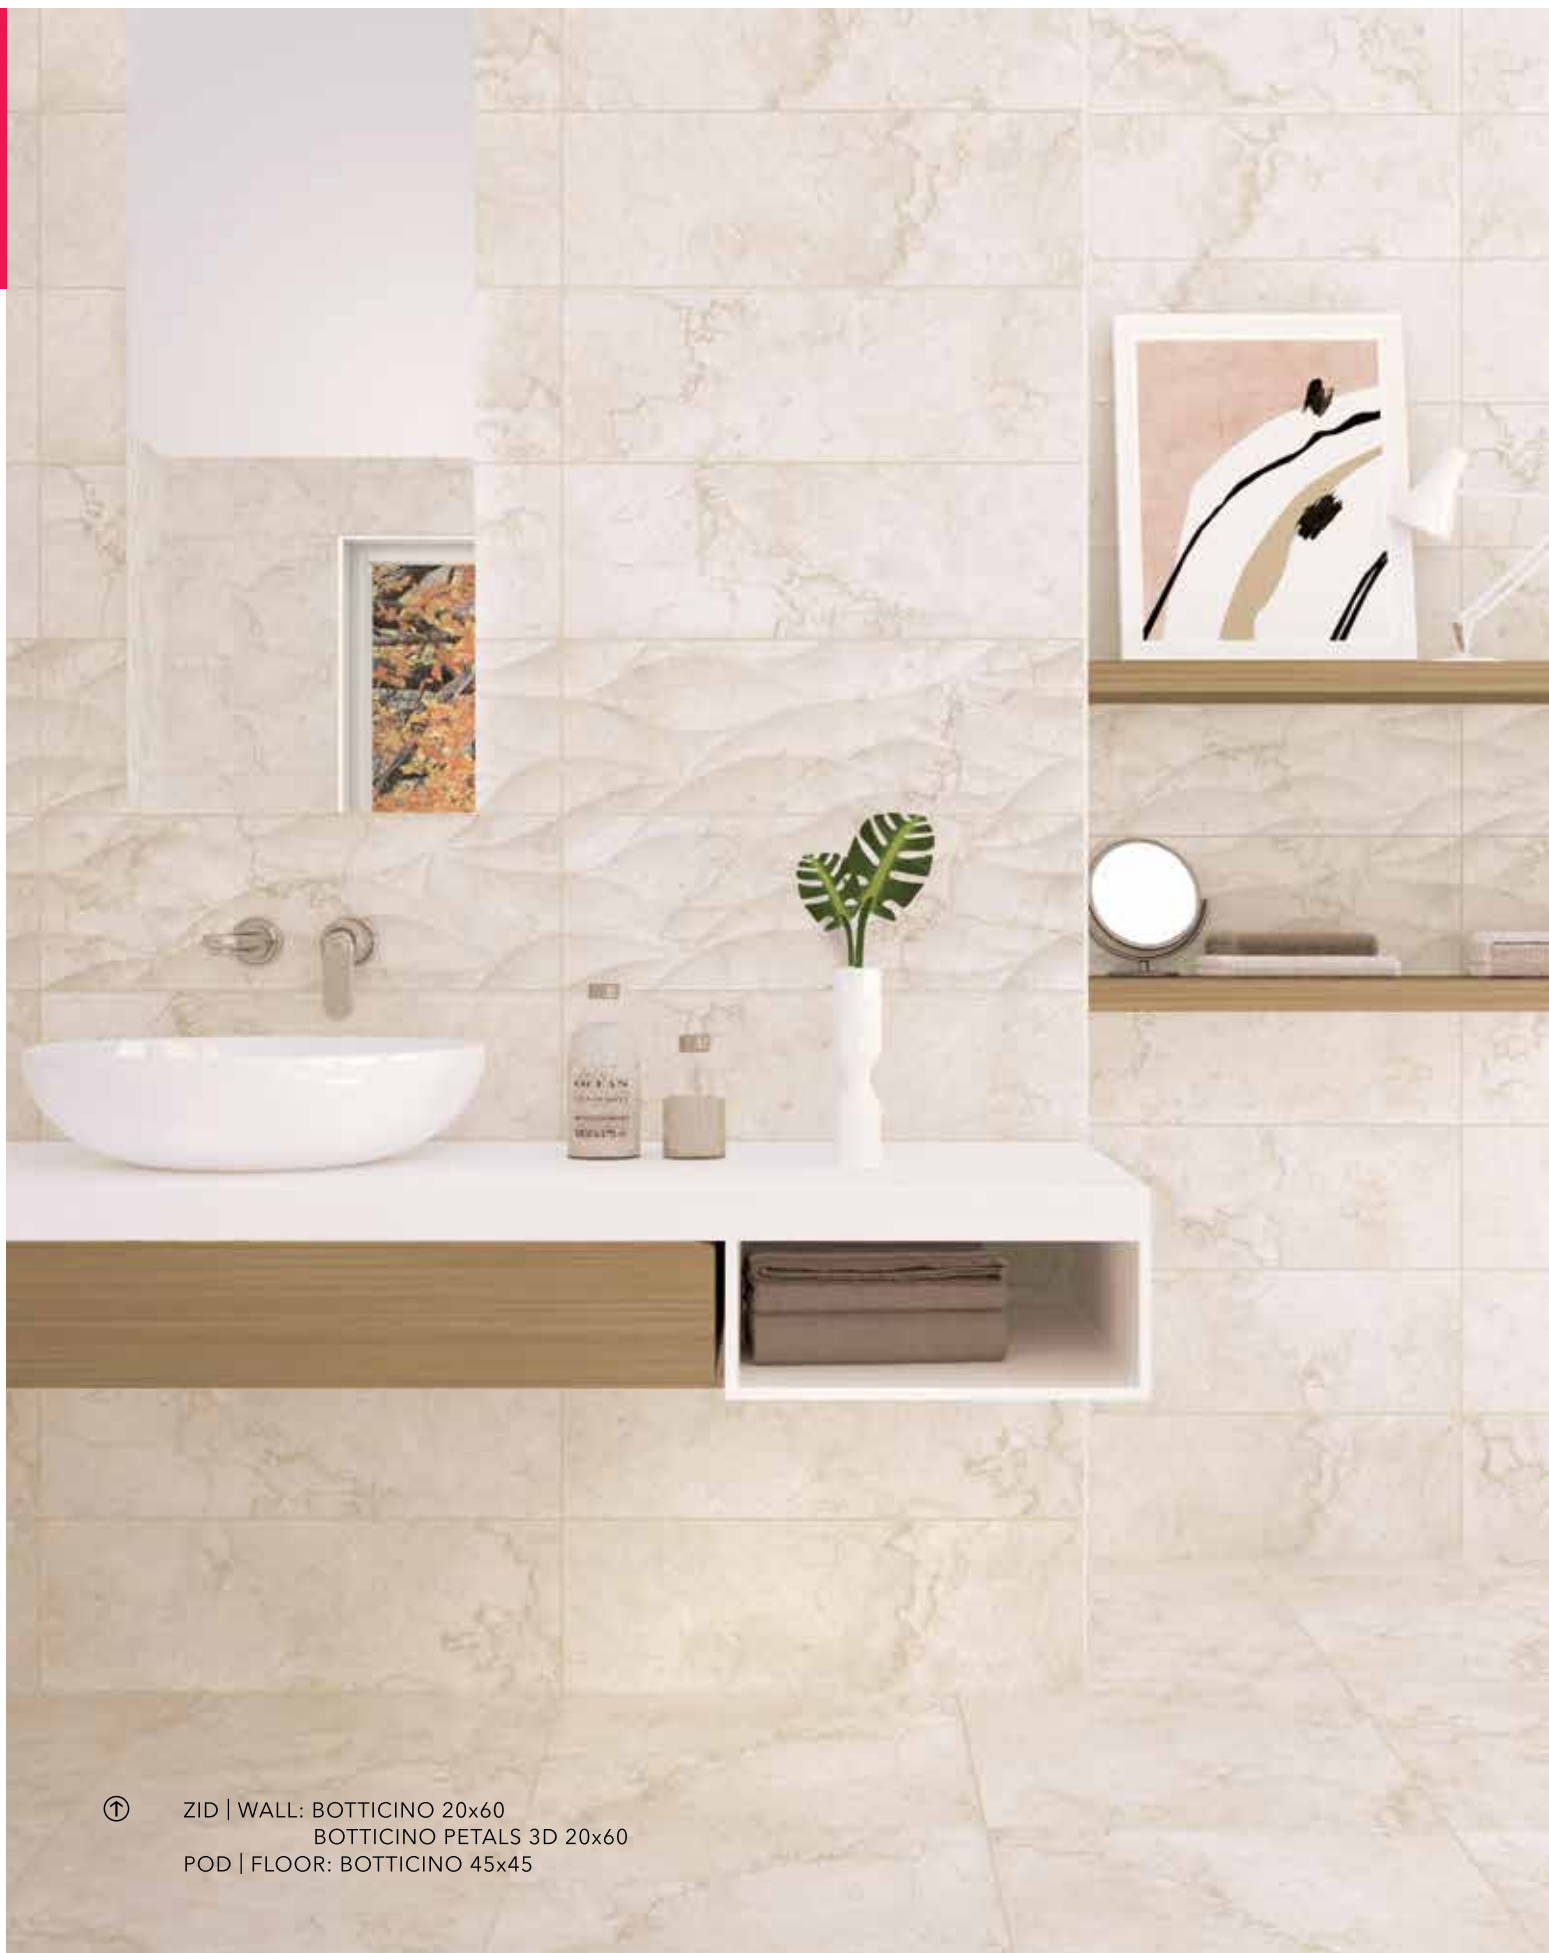

Ⓢ ZID | WALL: BOTTICINO 20x60
BOTTICINO PETALS 3D 20x60
POD | FLOOR: BOTTICINO 45x45



NOVO
NEW

12



BOTTICINO 20x60 cm / WT




12

BOTTICINO DIAMONDS 20x60 cm / WT

12



BOTTICINO PETALS 3D 20x60 cm / WT



DIN DIN
51097 51130

PEI
4

7



BOTTICINO 45x45 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
20x60	0,1200	13	1,560	23,80	68,640	1070,00	IN INSERT KOM / PC	
45x45	0,2025	5	1,012	17,55	66,792	1180,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	




ZID | WALL: SMART CREMA 20x60
SMART BLUE 20x60
SMART DECO BLUE 20x60
POD | FLOOR: SMART CREMA 45x45



UNUTRAŠNJA
INDOOR

NOVO
NEW

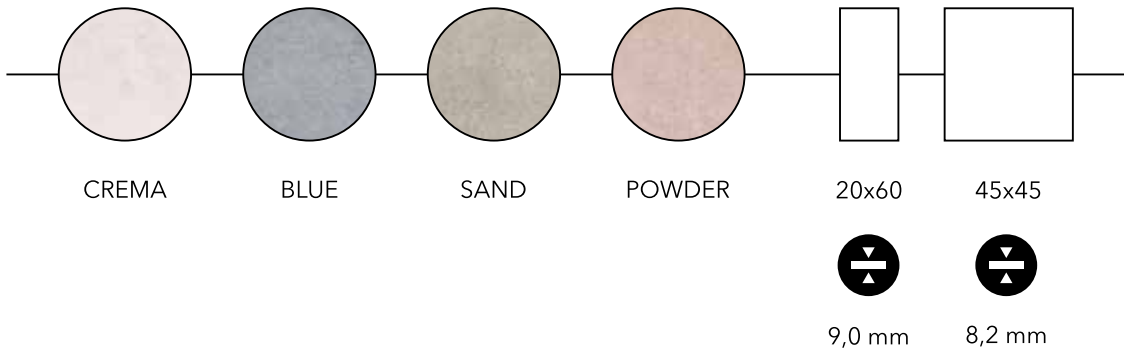


smart

Elegancija i nežnost sinonim su za seriju zidnih pločica Smart. Osnovni dekor betona daje joj dozu jednostavnosti, dok pažljivo odabrane nežne boje i dekori omogućavaju da postignete efekat topline u vašem kupatilu.

Elegance and tenderness are synonymous for Smart wall tile series. The basic decor of concrete gives it a dose of simplicity, while carefully selected gentle colors and decors allow you to achieve the effect of warmth in your bathroom.

SQUARE AFFAIR

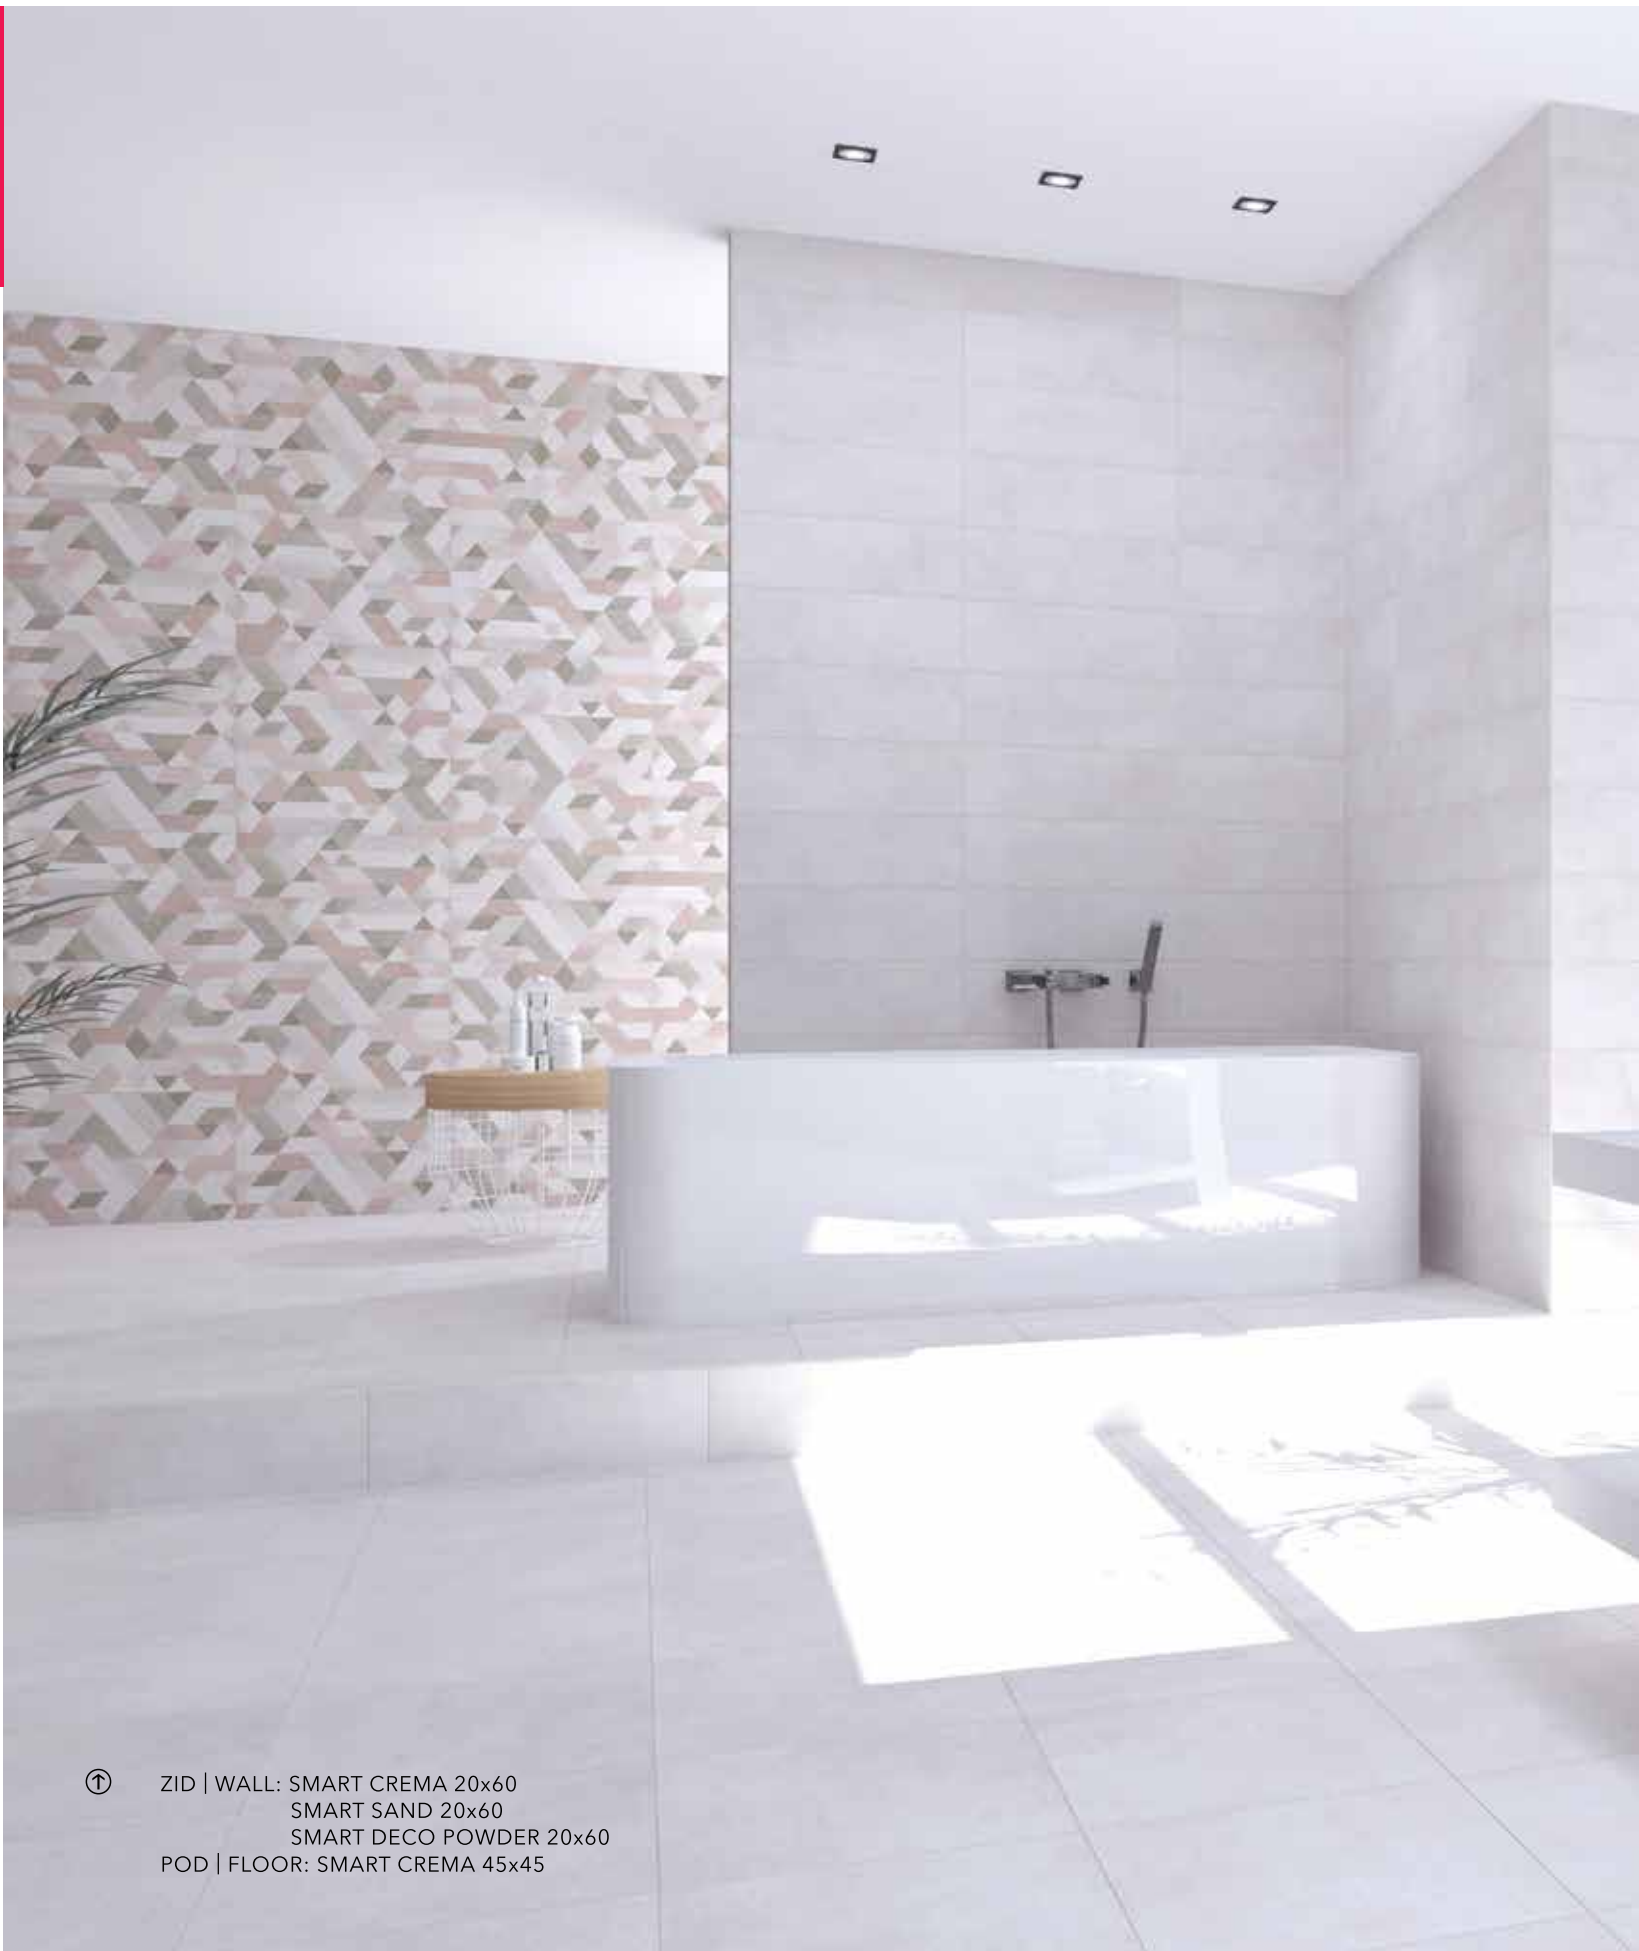

Ⓢ ZID | WALL: SMART CREMA 20x60
SMART SAND 20x60
SMART DECO POWDER 20x60
POD | FLOOR: SMART CREMA 45x45





ZID | WALL: SMART POWDER 20x60
SMART DECO POWDER 20x60


PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION		PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT	WALL TILES / ZIDNE PLOČICE M ²	
							FT	FLOOR TILES / PODNE PLOČICE M ²	
							LI	LISTELA KOM / PC	
20x60	0,1200	13	1,560	23,80	68,640	1070,00	IN	INSERT KOM / PC	
45x45	0,2025	5	1,012	17,55	66,792	1180,00	RETT	REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



NOVO
NEW

18

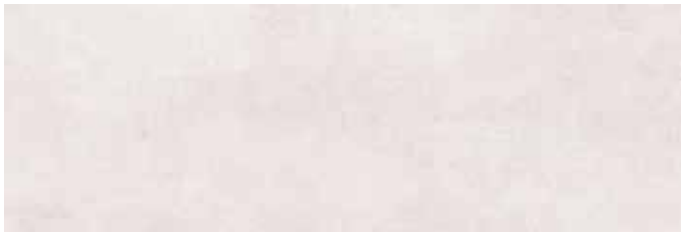

SMART CREMA 20x60 cm / WT

18



SMART POWDER 20x60 cm / WT

18



SMART BLUE 20x60 cm / WT

8



SMART DECO BLUE 20x60 cm / WT

18



SMART SAND 20x60 cm / WT

8



SMART DECO POWDER 20x60 cm / WT



DIN 51097 DIN 51130

PEI
4

12




SMART CREMA 45x45 cm / FT



ZID | WALL: JOY WHITE 20x60
JOY MOSAIC 3D WHITE 20x60
JOY BEIGE 20x60
POD | FLOOR: CHIC 15x60



UNUTRAŠNJA
INDOOR

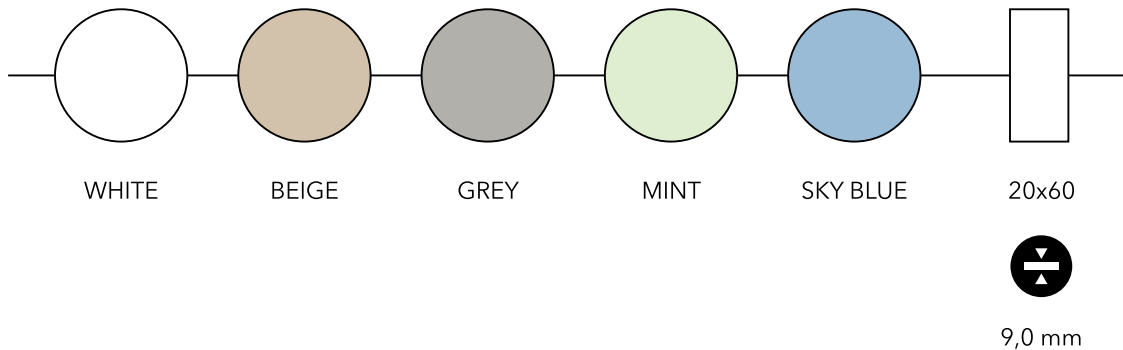

joy

Luksuzna serija iz Square Affair ponude je i serija Joy. Odlikuju je jasne, pune boje i visok sjaj glazure. Odličan je izbor za sve koji prate trendove, a njena lepota je u tome što se savršeno uklapa uz podne pločice sa imitacijom drveta dajući nataj način prostoru šik i moderan izgled.

The luxury series from the Square Affair offer is also the Joy series. It is characterized by clear, full colors and high gloss glaze. It is a great choice for all those who follow trends, and its beauty is that it fits perfectly with floor tiles with wood imitation, thus giving the space a chic and modern look.

SQUARE AFFAIR



ZID | WALL: JOY WHITE 20x60
 JOY MOSAIC 3D WHITE 20x60
 JOY GREY 20x60
 POD | FLOOR: STYLE GREY 15x60




SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:

CHIC 15x60 cm - na strani / see page 51

LUXOR 59x59 cm rett - na strani / see page 24

FEELING 29,5x59 cm rett, 15x60 cm - na strani / see page 44

STYLE 15x60 cm - na strani / see page 48

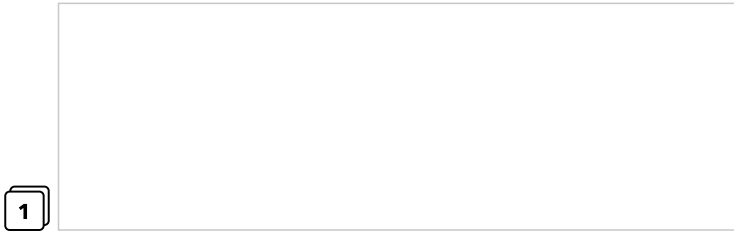

1

JOY WHITE 20x60 cm / WT


1

JOY BEIGE 20x60 cm / WT

1

JOY GREY 20x60 cm / WT

1

JOY SKY BLUE 20x60 cm / WT

1

JOY MINT 20x60 cm / WT








1

JOY MOSAIC 3D WHITE 20x60 cm / WT

1

JOY PETALS 3D WHITE 20x60 cm / WT**JOY SKY BLUE** 20x60 cm / WT**JOY MINT** 20x60 cm / WT**NOVO
NEW**

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
20x60	0,1200	13	1,560	23,80	68,640	1070,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



ZID | WALL: ELEGANT CREMA 20x60
ELEGANT MOSAIC 3D CREMA 20X60
POD | FLOOR: ELEGANT CREMA 45x45



UNUTRAŠNJA
INDOOR

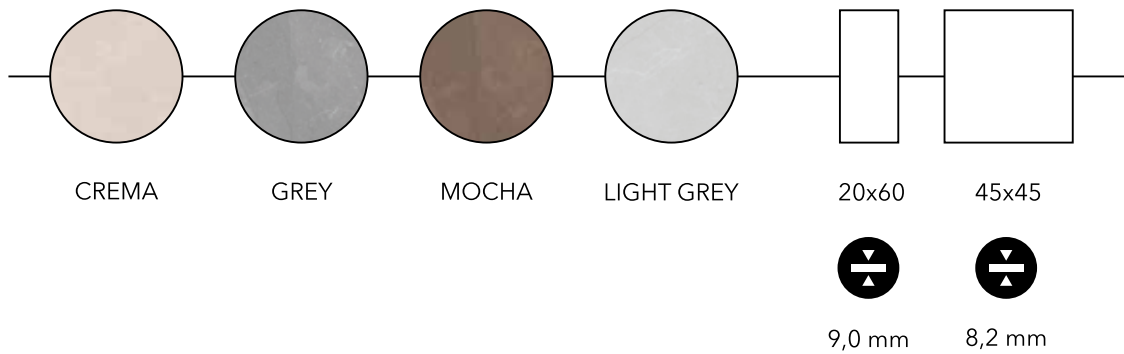

elegant

Zemljani tonovi u kombinaciji sa detaljima mermera specifični su za seriju Elegant. I ako je u pitanju imitacija vrste kamena, upravo pažljiv odabir boja i dekora omogućava da upotrebom ove serije postignete efekat topline.

Earth tones combined with marble details are specific to the Elegant series. Although it is the imitation of stone, the careful selection of colors and decor allows you to achieve the effect of warmth by using this series.

SQUARE AFFAIR



⌚ ZID | WALL: ELEGANT LIGHT GREY 20x60
ELEGANT GREY 20x60
ELEGANT MOSAIC 3D GREY 20X60
POD | FLOOR: ELEGANT GREY 45x45






ZID | WALL: ELEGANT LIGHT GREY 20x60
ELEGANT MOSAIC 3D GREY 20X60
POD | FLOOR: ELEGANT GREY 45x45

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
20x60	0,1200	13	1,560	23,80	68,640	1070,00	IN INSERT KOM / PC	
45x45	0,2025	5	1,012	17,55	66,792	1180,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

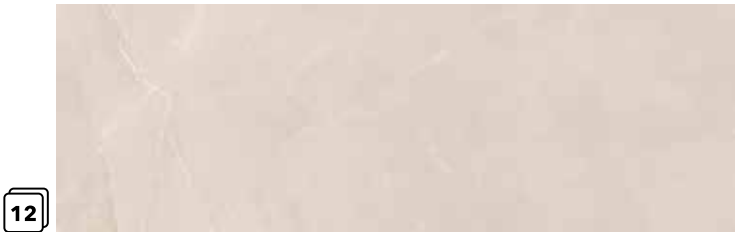

12

ELEGANT CREMA 20x60 cm / WT



12

ELEGANT MOCHA 20x60 cm / WT



12

ELEGANT LIGHT GREY 20x60 cm / WT




12

ELEGANT GREY 20x60 cm / WT



4

ELEGANT MOSAIC 3D CREMA 20x60 cm / WT

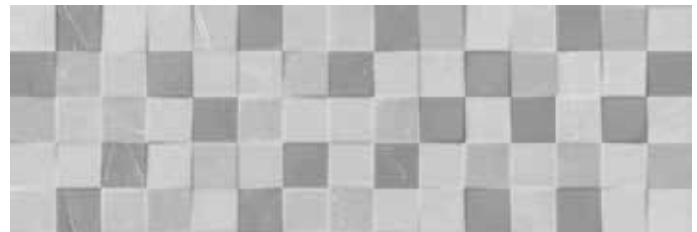

4

ELEGANT MOSAIC 3D GREY 20x60 cm / WT




DIN 51097 DIN 51130



PEI 4

12

ELEGANT CREMA 45x45 cm / FT

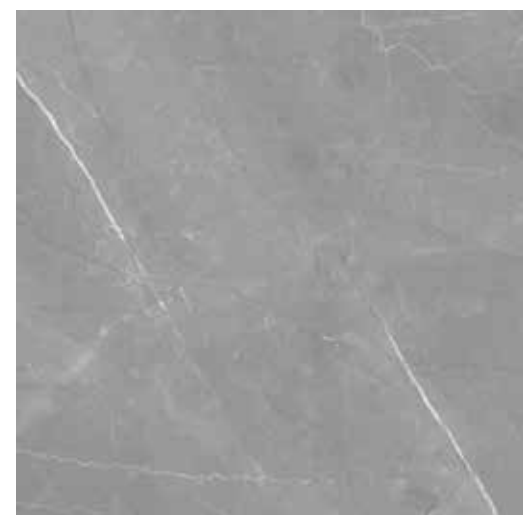

PEI 3

12

ELEGANT GREY 45x45 cm / FT




ZID | WALL: KASHMIR GOLD 25x50
KASHMIR ONDA 3D GOLD 25x50
POD | FLOOR: KASHMIR GOLD 33x33



UNUTRAŠNJA
INDOOR



NOVO
NEW

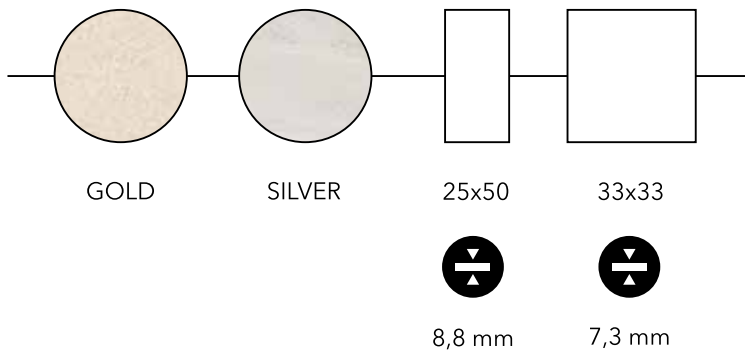

kashmir

Ovu seriju odlikuju dve nežne nijanse bež i sive boje. Uz jednostavnost boja, bogati detalji mermera daju dozu elegancije zbog čega je ova serija odličan izbor za projekte i poslovne prostore.

This series is characterized by two gentle shades of beige and gray. With the simplicity of colors, rich details of marble give a dose of elegance, which is why this series is a great choice for projects and business premises.

SQUARE AFFAIR



① ZID | WALL: KASHMIR SILVER 25x50
KASHMIR ONDA 3D SILVER 25x50
POD | FLOOR: KASHMIR SILVER 33x33



NOVO
NEW



KASHMIR GOLD 25x50 cm / WT




KASHMIR SILVER 25x50 cm / WT




KASHMIR ONDA 3D GOLD 25x50 cm / WT



KASHMIR ONDA 3D SILVER 25x50 cm / WT



DIN DIN
51097 51130

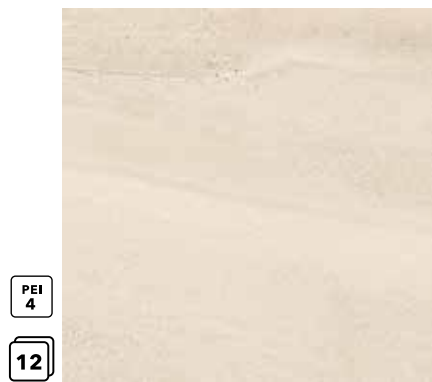

KASHMIR GOLD 33x33 cm / FT



KASHMIR SILVER 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION		PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT	FT	
							WT	WALL TILES / ZIDNE PLOČICE M ²	
							FT	FLOOR TILES / PODNE PLOČICE M ²	
							LI	LISTELA KOM / PC	
							IN	INSERT KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	RETT	REKTIFIKOVANA PLOČICA / RECTIFIED TILE	
33x33	0,1089	16	1,742	26,56	73,164	1140,00			




ZID | WALL: MERCURY ICE 25x50
MERCURY GREY 25X50
MERCURY CRAFT 25x50
POD | FLOOR: MERCURY ICE 33x33



UNUTRAŠNJA
INDOOR



NOVO
NEW

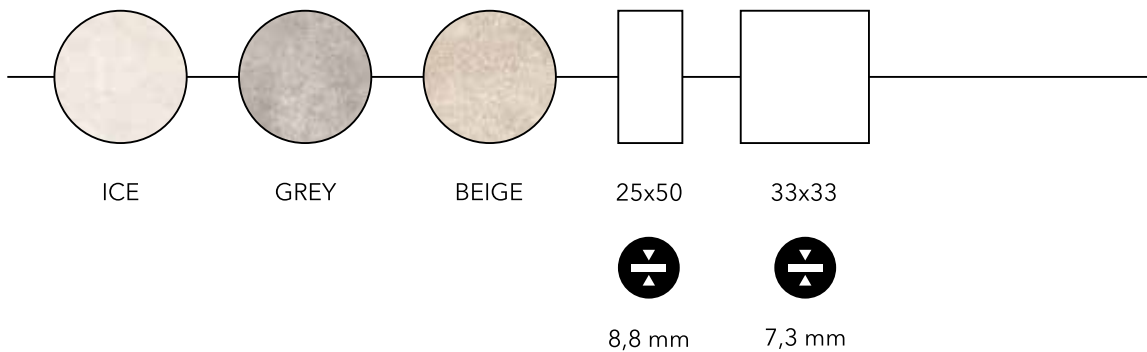


mercury

Savršena imitacija betona čini seriju Mercury. Tri osnovne boje kao i raskošan dekor pačvorka omogućava savršen spoj sa potpuno različitim stilovima opremanja enterijera - od rustike, preko minimalizma do industrijskog dizajna.

The perfect imitation of concrete makes the Mercury series. The three basic colors as well as the sumptuous decor of the patchwork allows a perfect blend of this series with completely different styles of interior design - from rustic, through minimalism to industrial design.

SQUARE AFFAIR

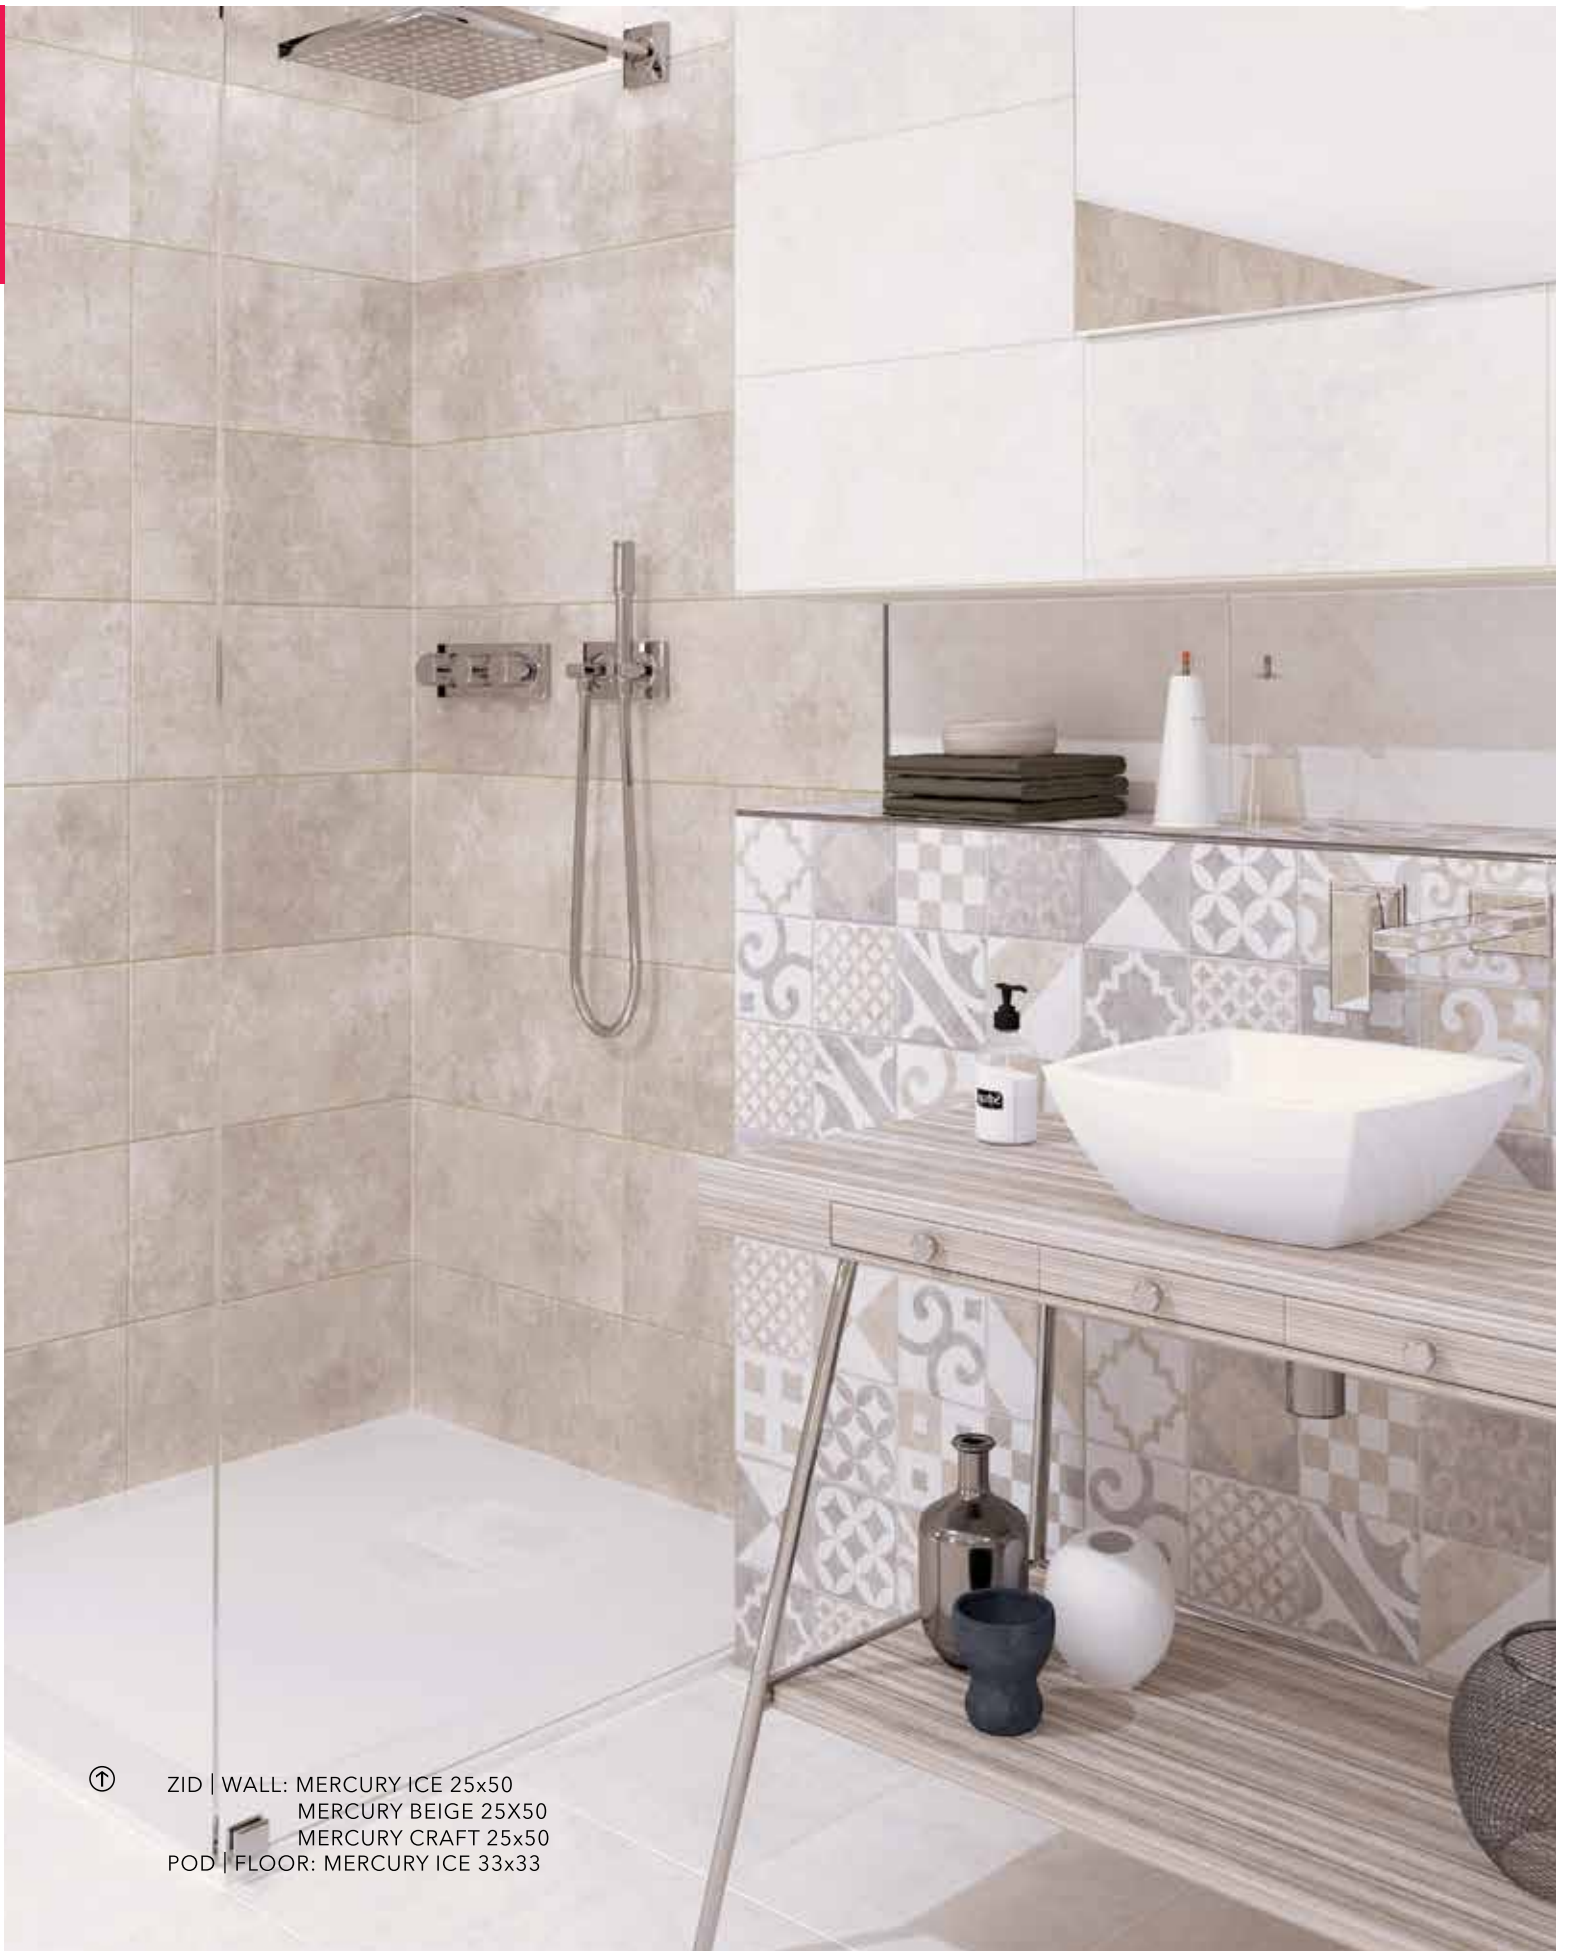

Ⓢ ZID | WALL: MERCURY ICE 25x50
MERCURY BEIGE 25X50
MERCURY CRAFT 25x50
POD | FLOOR: MERCURY ICE 33x33



NOVO
NEW

12



MERCURY ICE 25x50 cm / WT

12



MERCURY GREY 25x50 cm / WT

12



MERCURY BEIGE 25x50 cm / WT

6



MERCURY CRAFT 25x50 cm / WT



DIN 51097 DIN 51130

PEI
4


12



MERCURY ICE 33x33 cm / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	26,56	73,164	1140,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

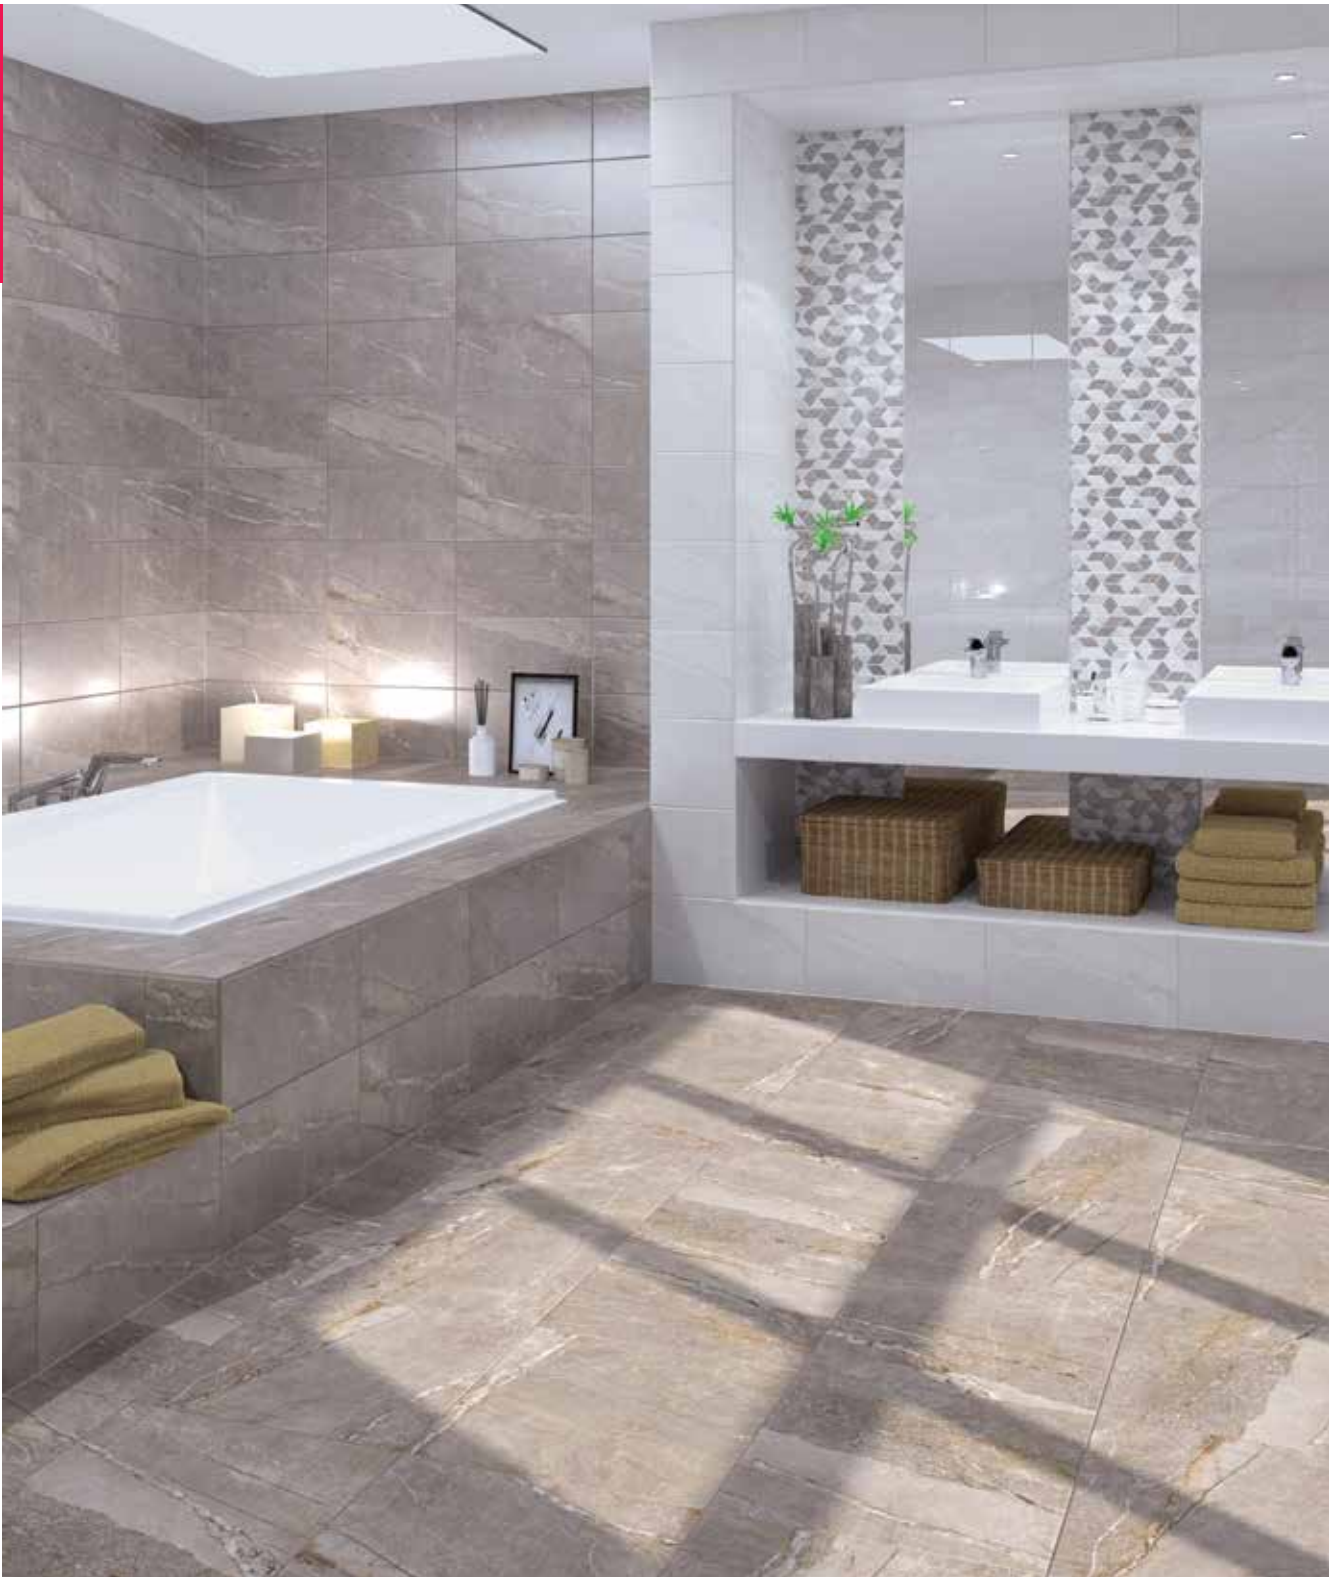

ZID | WALL: KINGSTONE ICE 25x50
KINGSTONE BROWN 25x50
KINGSTONE CUBE 25x50
POD | FLOOR: KINGSTONE BROWN 45x45



UNUTRAŠNJA
INDOOR

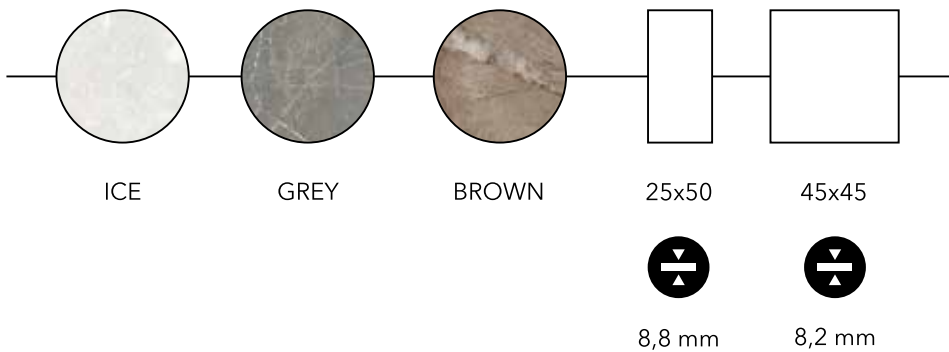

kingstone

Raskošna serija zidnih pločica sa dekorom kamena. Realno reprodukovani detalji, vene i boje daju ovoj seriji luksuzan izgled.

Luxurious series of wall tiles with stone decor. Realistically reproduced details, veins and colors give this series a luxurious look.

SQUARE AFFAIR



Ⓢ ZID | WALL: KINGSTONE ICE 25x50
KINGSTONE GREY 25x50
KINGSTONE CUBE 25x50
POD | FLOOR: KINGSTONE GREY 45x45



12



KINGSTONE ICE 25x50 cm / WT

12



KINGSTONE ONDA 3D ICE 25x50 cm / WT

12



KINGSTONE GREY 25x50 cm / WT

12



KINGSTONE BROWN 25x50 cm / WT

6



KINGSTONE CUBE 25x50 cm / WT



DIN 51097 DIN 51130



PEI 3

9

KINGSTONE GREY 45x45 cm / FT



PEI 3

9

KINGSTONE BROWN 45x45 cm / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	IN INSERT KOM / PC	
45x45	0,2025	5	1,012	17,55	66,792	1180,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



ZID | WALL: MARFIL CREMA 25x50
MARFIL CAPPUCCINO 25x50
MARFIL MOSAICO 25x50
POD | FLOOR: MARFIL CREMA 33x33



UNUTRAŠNJA
INDOOR

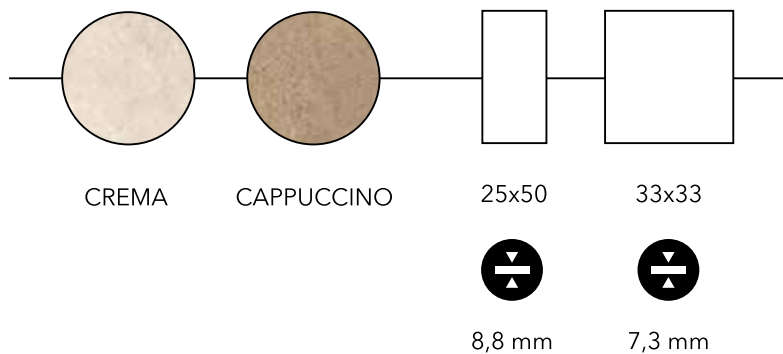

marfil


Seriya Marfil već dugi niz godina predstavlja omiljen izbor kupaca za opremanje kupatila. Odlikuje je dekor kamena, obogaćen toplim, zemljanim tonovima i zanimljivim dekorima. Zato pruža veliki broj mogućnosti kombinovanja i kreiranja različitih stilova.

For many years, the Marfil series has been a favorite choice of customers for bathroom equipment. It is characterized by stone decor, enriched with warm, earthy tones and interesting decors. That is why it provides a large number of possibilities for combining and creating different styles.

SQUARE AFFAIR



Ⓢ ZID | WALL: MARFIL CREMA 25x50
MARFIL CAPPUCCINO 25x50
MARFIL MOSAICO 25x50
POD | FLOOR: MARFIL CREMA 33x33

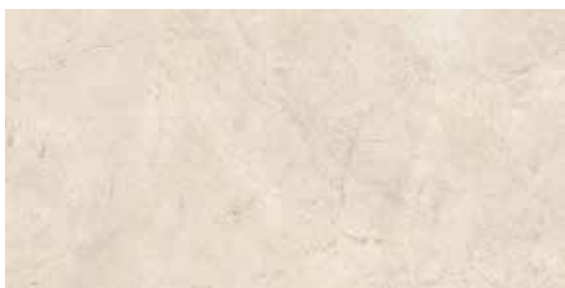

10

MARFIL CREMA 25x50 cm / WT



4

MARFIL MOSAICO 25x50 cm / WT



10

MARFIL CAPPUCCINO 25x50 cm / WT



DIN 51097 DIN 51130




PEI 4

10

MARFIL CREMA 33x33 cm / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	26,56	73,164	1140,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

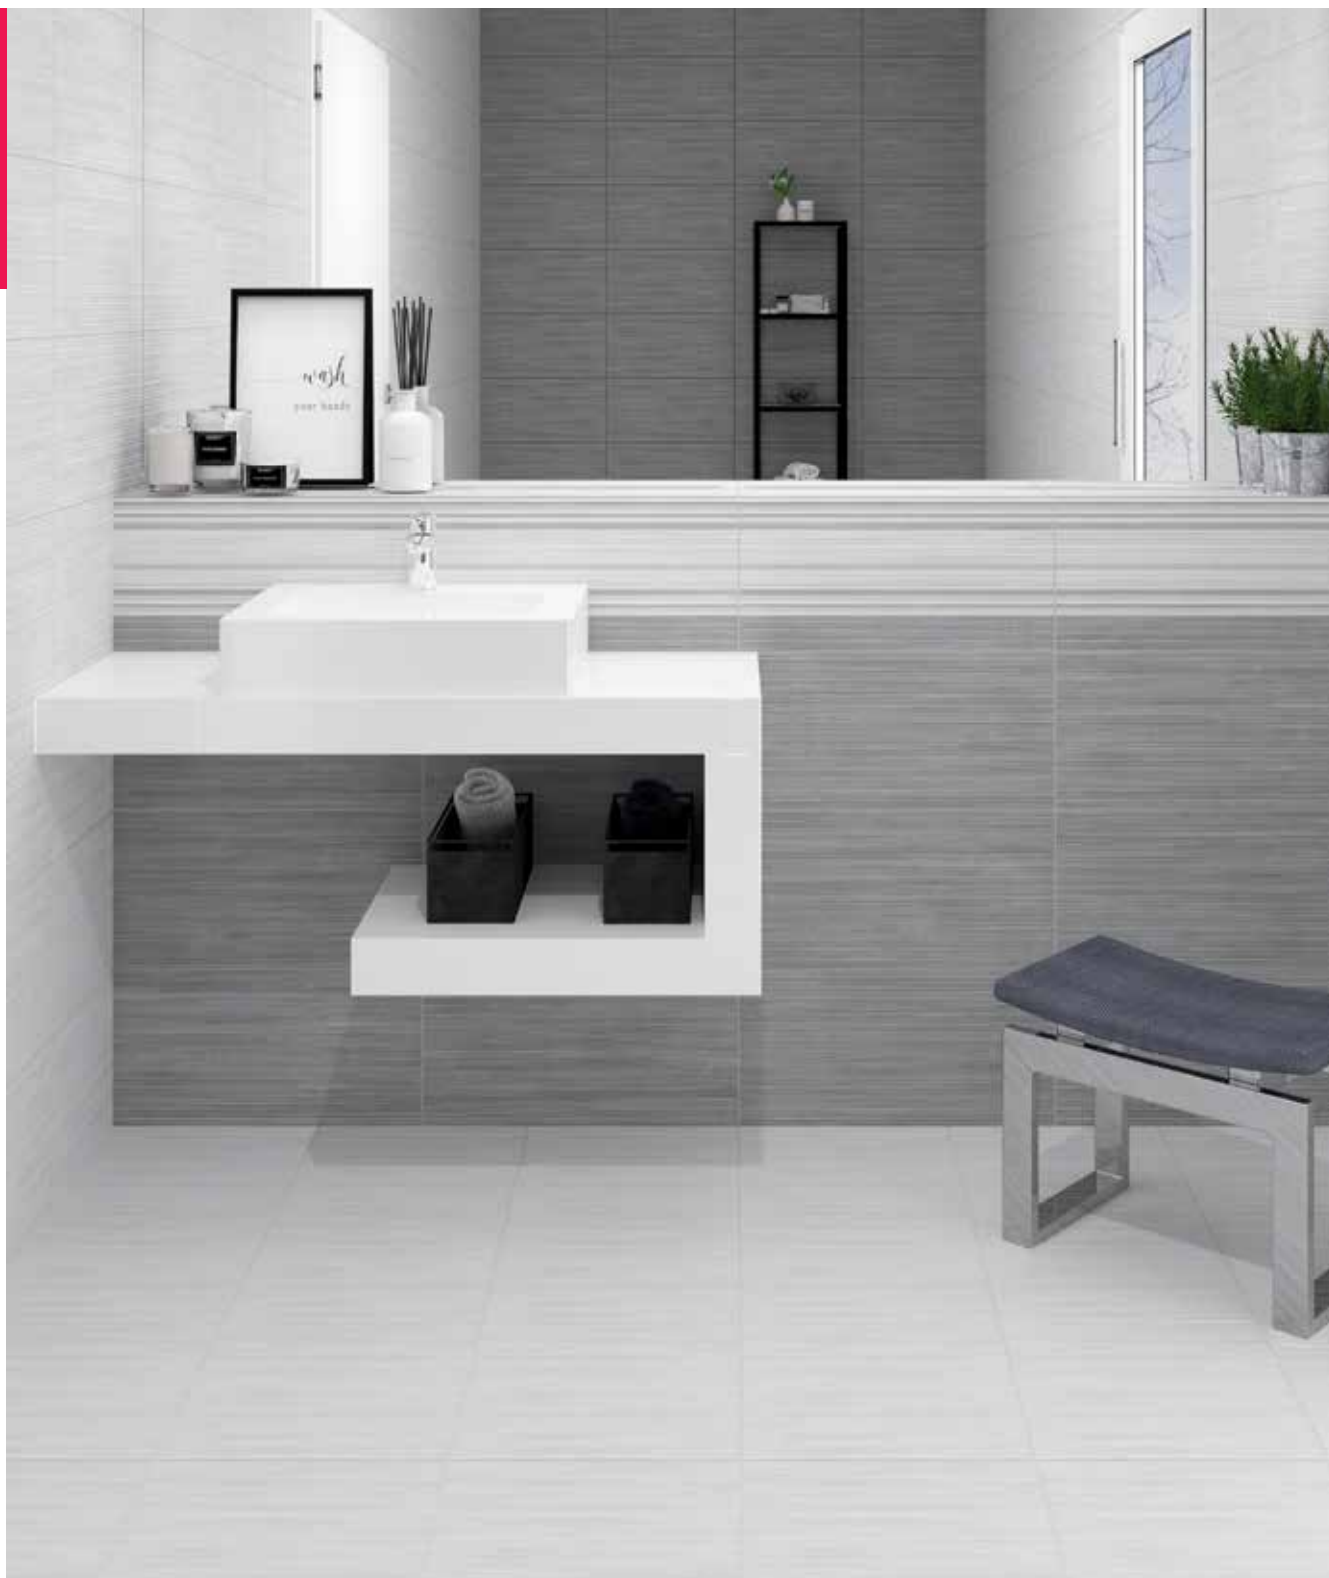

ZID | WALL: ARCTIC ICE 25x50
ARCTIC DARK 25x50
ARCTIC LINE 25x50
POD | FLOOR: ARCTIC ICE 33x33



UNUTRAŠNJA
INDOOR

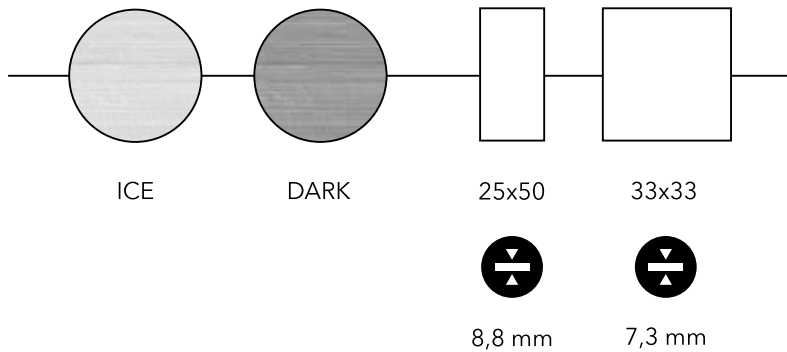

arctic

Seriya Arctic idealan je izbor za projekte i poslovne prostore. Odlikuju je jednostavnost dekora i boja, zbog čega se može uklopiti u svaki stil i ambijent.

The Arctic series is an ideal choice for projects and business premises. It is characterized by simplicity of decor and colors, which is why it can fit into any style and ambience.

SQUARE AFFAIR



⤴ ZID | WALL: ARCTIC ICE 25x50
ARCTIC DARK 25x50
POD | FLOOR: ARCTIC ICE 33x33



6

ARCTIC ICE 25x50 cm / WT




6

ARCTIC DARK 25x50 cm / WT



1

ARCTIC INDA ICE 25x50 cm / WT

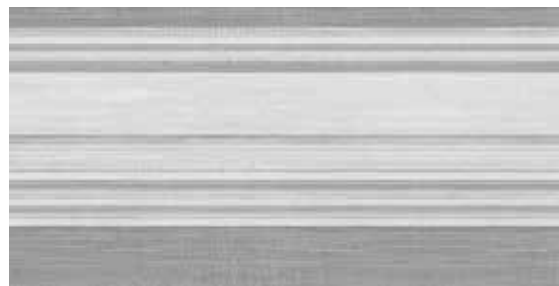

4

ARCTIC LINE 25x50 cm / WT



DIN 51097 DIN 51130



PEI 4

6

ARCTIC ICE 33x33 cm / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION		PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT	FT	
							WT	WALL TILES / ZIDNE PLOČICE M ²	
							FT	FLOOR TILES / PODNE PLOČICE M ²	
							LI	LISTELA KOM / PC	
							IN	INSERT KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	RETT	REKTIKOVANA PLOČICA / RECTIFIED TILE	
33x33	0,1089	16	1,742	26,56	73,164	1140,00			



ZID | WALL: COMFORT BEIGE 25x50
COMFORT DARK 25x50
POD | FLOOR: COMFORT BEIGE 33x33



UNUTRAŠNJA
INDOOR

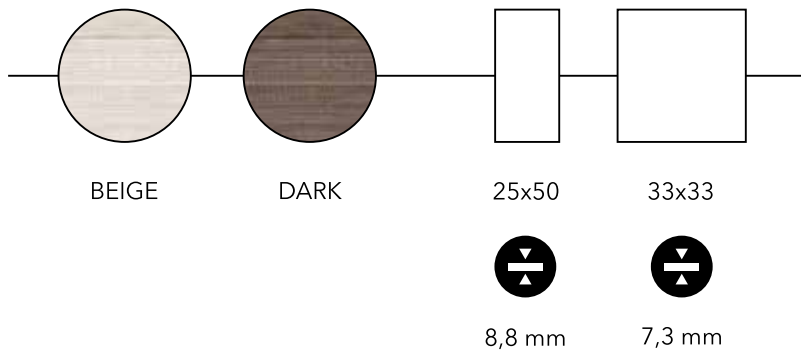

comfort


Topli tonovi kafe prva su asocijacija za ovu seriju. Odlična je za postizanje efekta rustike i ušuškanosti.

Warm coffee tones are the first association for this series. It is great for achieving a rustic and tucked-in effect.

SQUARE AFFAIR



ZID | WALL: COMFORT BEIGE 25x50
COMFORT DARK 25x50
COMFORT LINE 25x50
POD | FLOOR: COMFORT BEIGE 33x33



COMFORT BEIGE 25x50 cm / WT



COMFORT DARK 25x50 cm / WT



COMFORT WAVES 7x50 cm / LI



COMFORT CUBE 5x50 cm / LI



COMFORT LINE 25x50 cm / WT




DIN 51097 DIN 51130



COMFORT BEIGE 33x33 cm / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	26,56	73,164	1140,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

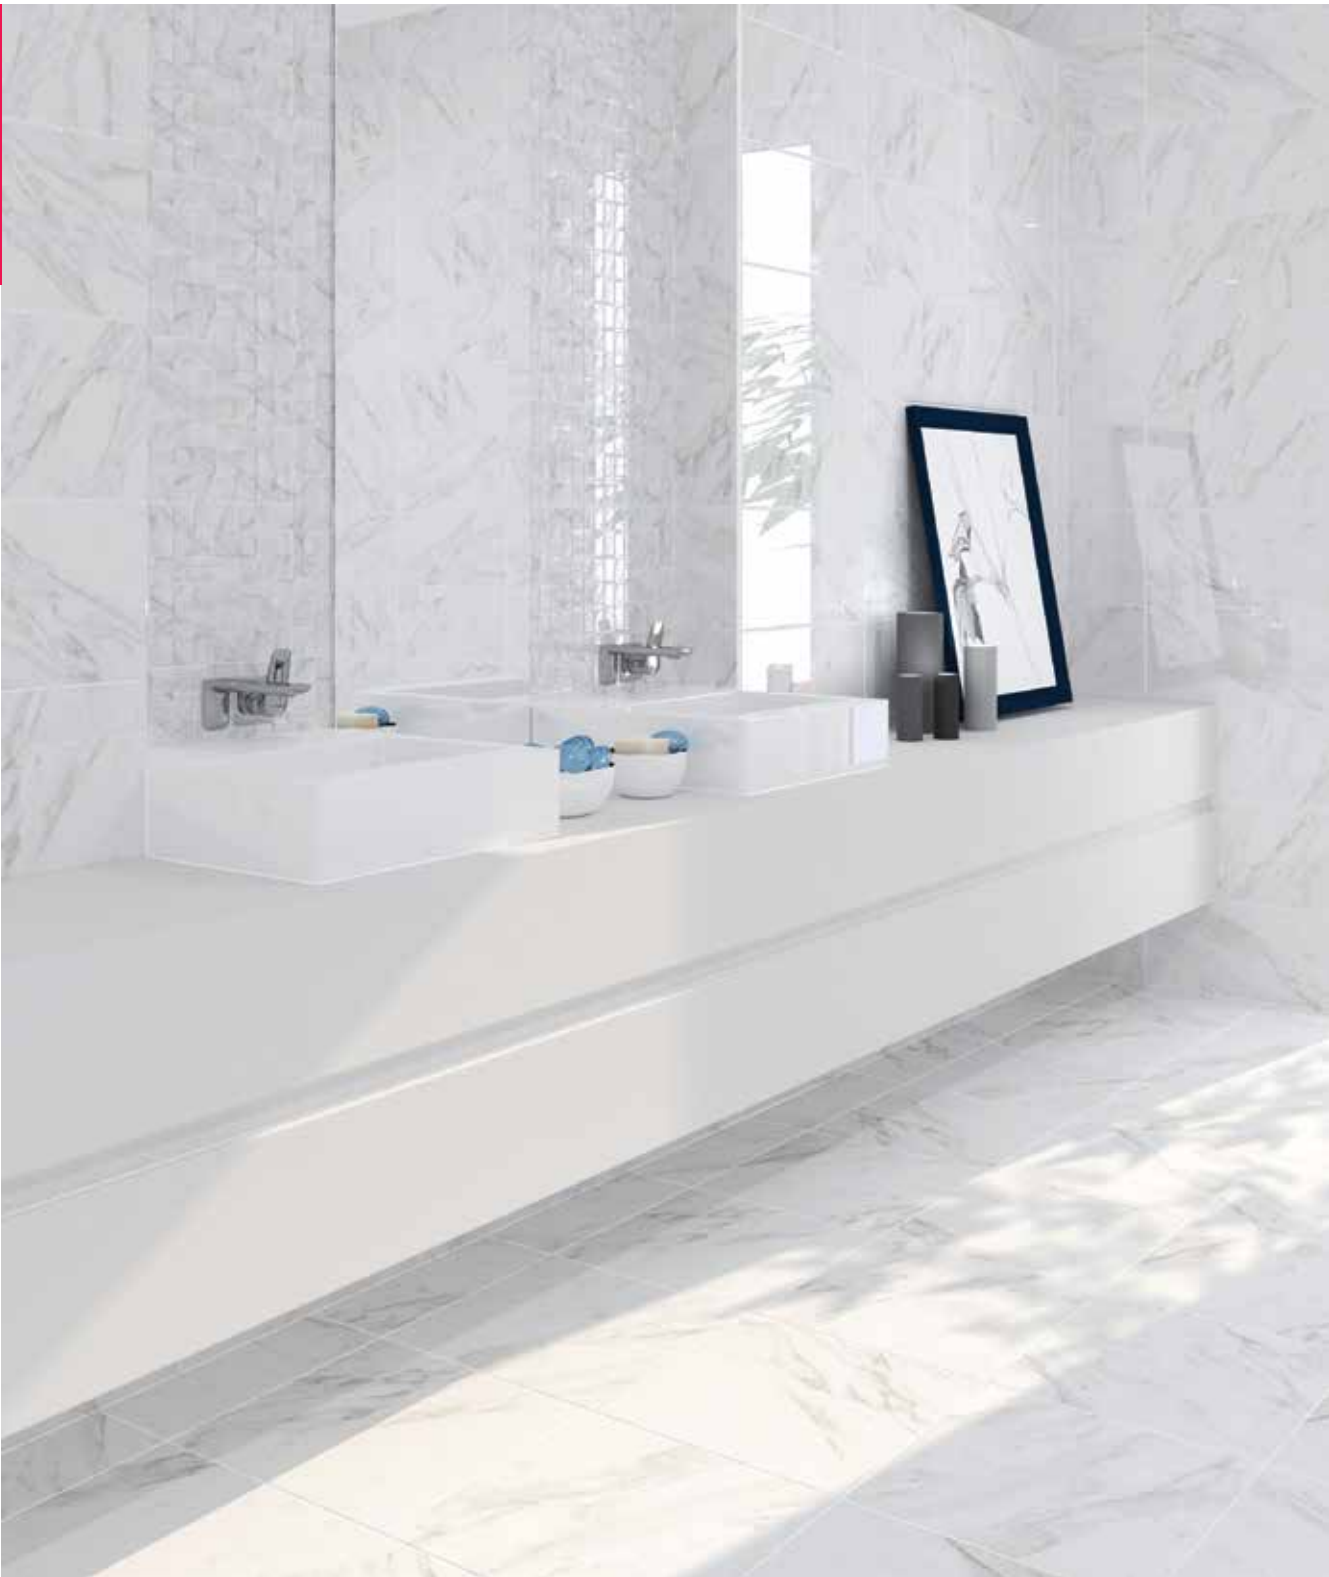

ZID | WALL: CARRARA 25x50
CARRARA MOSAIC 3D 25x50
POD | FLOOR: CARRARA 45x45



UNUTRAŠNJA
INDOOR

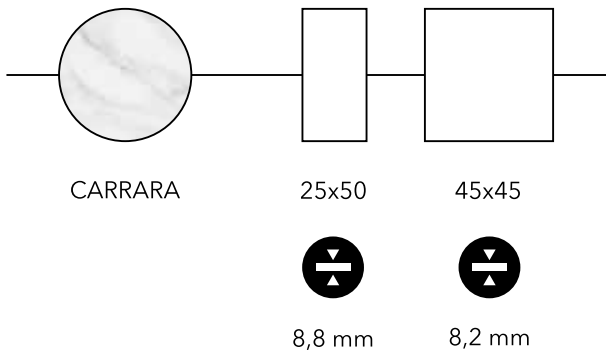

carrara

Beli mermer kao klasika koja nikad ne izlazi iz mode prenet je na seriju Carrara. Nežna ali moćna, pružiće vašem prostoru efekat raskoši i moderan izgled.

White marble as a classic that never goes out of fashion has been transferred to the Carrara series. Gentle but powerful, it will give your space the effect of luxury and a modern look.

SQUARE AFFAIR



⌚ ZID | WALL: CARRARA 25x50
CARRARA ONDA 3D 25x50
POD | FLOOR: CARRARA 45x45



10

CARRARA 25x50 cm / WT



4

CARRARA MOSAIC 3D 25x50 cm / WT



10

CARRARA ONDA 3D 25x50 cm / WT



DIN 51097 DIN 51130



PEI 4

8

CARRARA 45X45 cm / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION		PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT	FT	
							WT	WALL TILES / ZIDNE PLOČICE M ²	
							FT	FLOOR TILES / PODNE PLOČICE M ²	
							LI	LISTELA KOM / PC	
							IN	INSERT KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	RETT	REKTIFIKOVANA PLOČICA / RECTIFIED TILE	
45x45	0,2025	5	1,012	17,55	66,792	1180,00			



ZID | WALL: HABITAT ICE 25x50
WAVES NOCE 25x50
POD | FLOOR: HABITAT NOCE 33x33



UNUTRAŠNJA
INDOOR

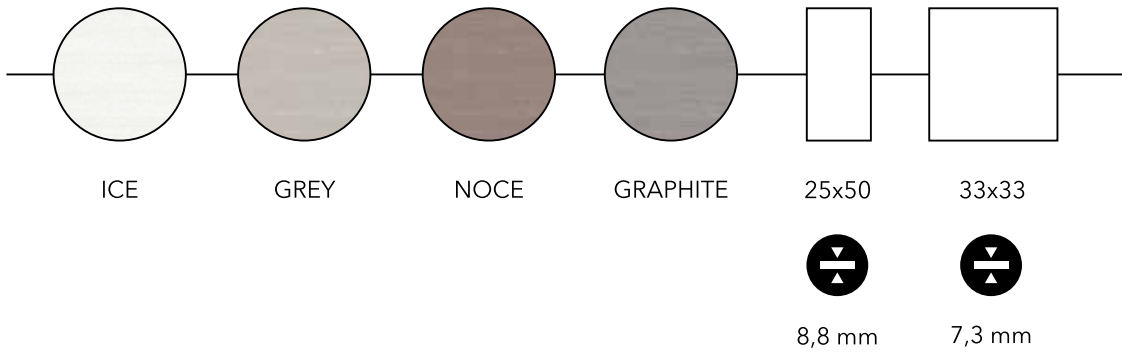

habitat

Već godinama best seler među Square Affair pločicama je serija Habitat. Zbog svoje jednostavnosti i savršeno odabranih boja ona je omiljeni izbor kako za projekte tako i za ličnu upotrebu kupaca.

For years, the best seller among Square Affair tiles has been the Habitat series. Due to its simplicity and perfectly chosen colors, it is a favorite choice for both projects and personal use of customers.

SQUARE AFFAIR



HABITAT ICE 25x50 cm / WT



HABITAT ICE ONDA 3D 25x50 cm / WT



HABITAT GREY 25x50 cm / WT



HABITAT NOCE 25x50 cm / WT



HABITAT GRAPHITE 25x50 cm / WT



1

WAVES ICE NOCE 25x50 cm / WT



1

WAVES ICE 25x50 cm / WT




1

WAVES NOCE 25x50 cm / WT



1

WAVES GRAPHITE 25x50 cm / WT

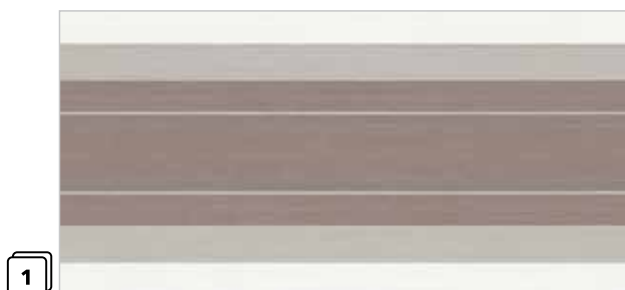

1

HABITAT STRIPES NOCE 25x50 cm / WT



1


HABITAT STRIPES 25x50 cm / WT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	
33x33	0,1089	16	1,742	26,56	73,164	1140,00		



① ZID | WALL: HABITAT ICE 25x50
HABITAT STRIPES 25x50
POD | FLOOR: HABITAT GRAPHITE 33x33



750L125 **WAVES** ICE NOCE 7x50 cm / LI



750L125 **WAVES** ICE 7x50 cm / LI



550L134 **HABITAT MOSAICO** NOCE 5x50 cm / LI



DIN 51097 DIN 51130

PEI 3

1



HABITAT NOCE 33x33 cm / FT

PEI 4

1



HABITAT GREY 33x33 cm / FT

PEI 3

1




HABITAT GRAPHITE 33x33 cm / FT



ZID | WALL: MAIOLICA BIANCO 25x50
MAIOLICA VINTAGE 25x50
POD | FLOOR: MAIOLICA BIANCO 33x33



UNUTRAŠNJA
INDOOR

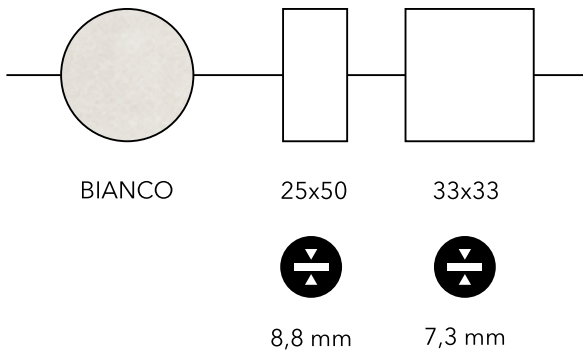

maiolica

Raskošna serija koja je oživela dekor stare keramike. Sitne pukotine i šare, sjajna glazura i prelepe boje pružiće prostoru jedinstven i originalan izgled. Zidne pločice iz serije Maiolica savršeno se uklapaju sa dekorima drveta.

A sumptuous series that revived the decor of old ceramics. Small cracks and patterns, shiny glaze and beautiful colors will give the space a unique and original look. Wall tiles from the Maiolica series fit perfectly with wooden decors.

SQUARE AFFAIR



ZID | WALL: MAIOLICA BIANCO 25x50
MAIOLICA VINTAGE BIANCO 25x50
POD | FLOOR: MAIOLICA VINTAGE 33x33



6

MAIOLICA BIANCO 25x50 cm / WT



4

MAIOLICA VINTAGE BIANCO 25x50 cm / WT



4

MAIOLICA VINTAGE 25x50 cm / WT



650L157 **MAIOLICA VINTAGE** 6X50 cm / LI



650L174 **MAIOLICA VINTAGE BIANCO** 6X50 cm / LI



DIN 51097 DIN 51130



PEI 4

6

MAIOLICA BIANCO 33x33 cm / FT



PEI 4

6

MAIOLICA VINTAGE 33x33 cm / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	26,56	73,164	1140,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



ZID | WALL: LIMESTONE BEIGE 25x50
LIMESTONE AQUARELLE BEIGE 25x50
POD | FLOOR: FEELING NOCE 15x60



UNUTRAŠNJA
INDOOR

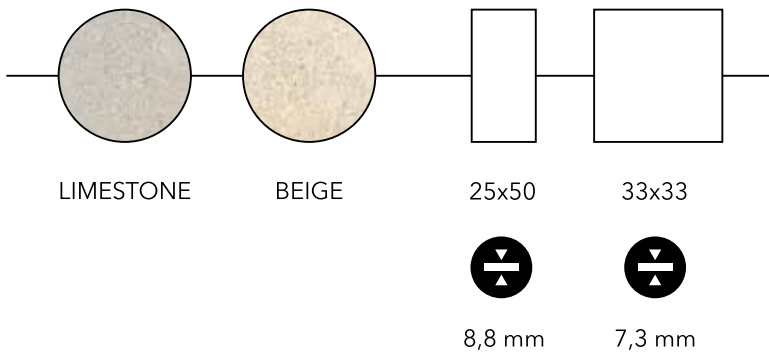

limestone

Nežan dekor kamena i mirne boje osnovnih pločica upotpunili su dekori Aquarelle, zbog čega je ova serija idealna za sve koji žele da budu jedinstveni. Prostoru daju veseo ali i prefinjen izgled.

The delicate stone decor and the calm colors of the base tiles are complemented by the Aquarella decors, which is why this series is ideal for everyone who wants to be unique. They give the space a cheerful but also refined look.

SQUARE AFFAIR



ZID | WALL: LIMESTONE 25x50
LIMESTONE LINE 3D 25x50

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	26,56	73,164	1140,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

LIMESTONE



6

LIMESTONE 25x50 cm / WT



8

LIMESTONE BEIGE 25x50 cm / WT



2

LIMESTONE AQUARELLE 25x50 cm / WT



4

LIMESTONE AQUARELLE BEIGE 25x50 cm / WT



6

LIMESTONE LINE 3D 25x50 cm / WT



8

LIMESTONE LINE 3D BEIGE 25x50 cm / WT



650L144 **LIMESTONE STELLA** 6X50 cm / LI

LIMESTONE



DIN 51097 DIN 51130



PEI 4

6

LIMESTONE 33x33 cm / FT



PEI 4

8


LIMESTONE BEIGE 33x33 cm / FT



ZID | WALL: FUSION 25x50
FUSION DARK 25x50
FUSION ONDA 3D 25x50
POD | FLOOR: FUSION 33x33



UNUTRAŠNJA
INDOOR

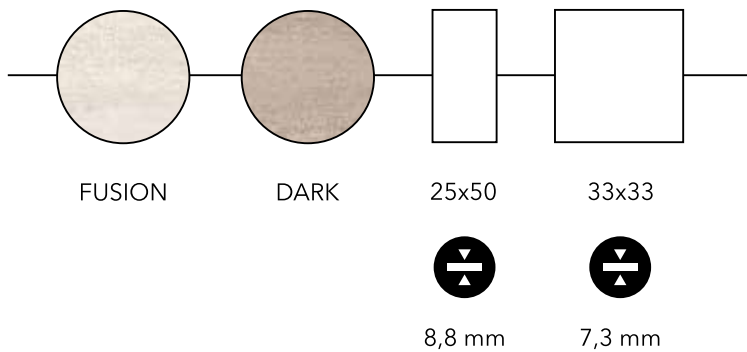

fusion

Dekor kamena nežnih detalja prenet je na seriju Fusion. Uz osnovne pločice, serija je obogaćena reljefnim ali i dekorima živih boja. Ljubitelji dekupaža obožavaju ovu seriju.

The stone decor with delicate details has been transferred to the Fusion series. In addition to the basic tiles, the series is enriched with embossed but also brightly colored decors. Decoupage fans love this series.

SQUARE AFFAIR



ZID | WALL: FUSION 25x50
FUSION VIOLA 50x50
POD | FLOOR: FUSION 33x33

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	26,56	73,164	1140,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



8

FUSION 25x50 cm / WT



8

FUSION ONDA 3D 25x50 cm / WT



8

FUSION DARK 25x50 cm / WT



FUSION VIOLA 50x50 cm / IN



1


FUSION INDA 25x50 cm / WT



550L115 **FUSION ARCOBALENO** 5X50 cm / LI



DIN 51097 DIN 51130

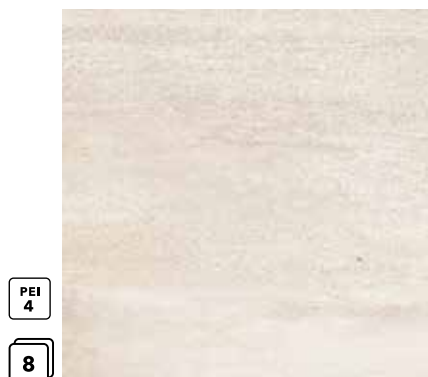

PEI 4

8


FUSION 33x33 cm / FT



ZID | WALL: BIANCA 25x50
BIANCA JAZZ 25x50
POD | FLOOR: STYLE GREY 15x60



UNUTRAŠNJA
INDOOR

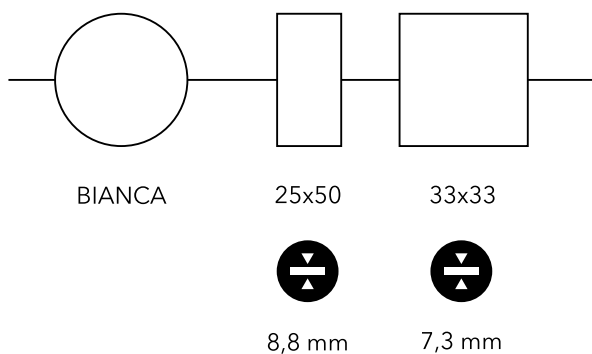

bianca

Klasika koja nikada ne izlazi iz mode - jednostavna bela pločica obogaćena živopisnim dekorima i dekorima sa reljefom. Pravi je izbor za ljubitelje klasike i „country“ stila opremanja.

A classic that never goes out of fashion - a simple white tile enriched with colorful decors and decors with relief. It is the right choice for fans of classics and "country" style of furnishing.

SQUARE AFFAIR



BIANCA



2550 **HOME** 25x50 cm / IN



2550 **BREAD** 25x50 cm / IN




450L163 **BREAD** 4x50 cm / LI




ZID | WALL: BIANCA 25x50
 BIANCA JAZZ 25x50
 POD | FLOOR: BIANCA 33x33

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
25x50	0,1250	15	1,875	28,35	67,500	1050,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	
33x33	0,1089	16	1,742	26,56	73,164	1140,00		

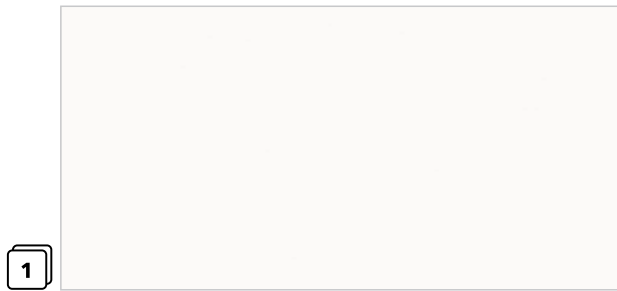

BIANCA 25x50 cm / WT

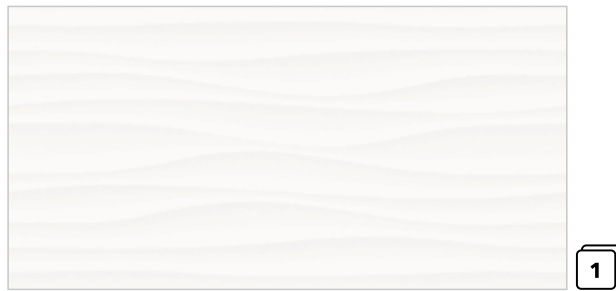

BIANCA ONDA 3D 25x50 cm / WT

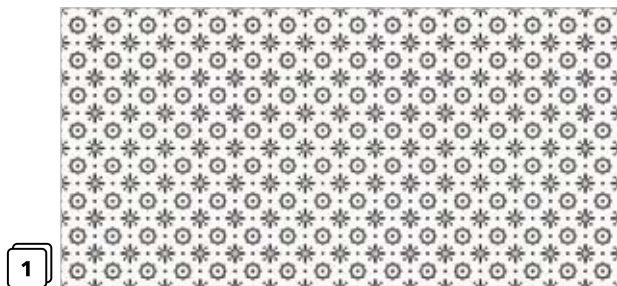

BIANCA PRINT 25x50 cm / WT



BIANCA JAZZ 25x50 cm / WT



BIANCA MILD 25x50 cm / WT

DIN 51097 DIN 51130



BIANCA 33x33 cm / FT

- 164. STANDARDI
- 166. PREPORUKE PRILIKOM UGRADNJE
- 167. SPECIFIKACIJA PAKOVANJA PLOČICA I GALANTERIJE
- 168. STANDARDS
- 170. RECOMMENDATIONS DURING INSTALLATION
- 171. CONDITIONS OF TILE AND DECOR PACKAGINGS
- 172. OBJAŠNJENJE SIMBOLA / SIMBOL EXPLANATION

**tehničke
karakteristike
technical
characteristics**

SQUARE AFFAIR



TEHNIČKE KARAKTERISTIKE

„Keramika Kanjiža“ doo iz Kanjiže proizvodi suvo presovane, jednom žarene podne i zidne keramičke pločice (takozvanu monokoturu i monoporožu) kao i ukrasnu galanteriju. Podne pločice su otporne na mraz, pogodne su za postavljanje spolja. Naše keramičke pločice u svim segmentima ispunjavaju zahteve harmonizovanog evropskog standarda SRPS EN 14411.

STANDARDI

Od decembra 2005. godine primenjuje se standard SRPS EN 14411, objavljen uz dozvolu Evropskog komiteta za standardizaciju CEN. Ovaj standard je identičan međunarodnom standardu EN 14411, koji je obavezan za primenu u svim zemljama članicama Evropske Unije. CE znak je simbol usaglašenosti proizvoda, proizvedenog u skladu sa harmonizovanim standardom koji ispunjava bitne zahteve direktive za građevinske proizvode.

Keramičke pločice razvrstavaju se na klase kvaliteta 1, 2 i 3 ispitane sledećim standardima:

SRPS EN 14411 Keramičke pločice – Definicije, klasifikacija, karakteristike, vrednovanje usaglašenosti i označavanje - Definiše termine klasifikacije, karakteristike, vrednovanje usaglašenosti i zahteve za označavanje keramičkih pločica klase kvaliteta 1.

SRPS B.D1.330 Keramičke pločice - Klasifikacija, karakteristike, ocenjivanje i verifikacija stalnosti performansi i označavanje - Definiše klasifikaciju, karakteristike, vrednovanje usaglašenosti i zahteve za označavanje keramičkih pločica klase kvaliteta 2 i 3.

Keramičke pločice razvrstavaju se prema načinu oblikovanja na:

- Keramičke pločice proizvedene vučenjem, Metoda A,
- Keramičke pločice proizvedene suvim presovanjem, Metoda B

Keramičke pločice razvrstavaju se prema upijanju vode na:

- Grupa Ia ako je upijanje vode manje od 0,5%
- Grupa Ib ako je upijanje vode od 0,5 do 3%
- Grupa IIa ako je upijanje vode od 3 do 6%
- Grupa IIb ako je upijanje vode od 6 do 10%
- Grupa III ako je upijanje vode preko 10%

Podela prema prirodi vidne površine:

- Glazirane (GL)
- Neglazirane (UGL)

Asortiman proizvoda Keramika Kanjiža razvrstava se na:

Podne pločice Grupa B Ia Prilog G

Zidne pločice Grupa B III Prilog K

Metode ispitivanja korišćene za određivanje karakteristika proizvoda su opisane u standardima SRPS ISO 10545.

SRPS ISO 10545-1 Uzimanje uzoraka i osnove za prihvatanje – Ovaj standard utvrđuje broj uzoraka koje treba proveriti iz partije i maksimalni broj dozvoljenih grešaka.

SRPS ISO 10545-2 Određivanje mera i kvaliteta vidne površine – Ovim standardom utvrđuje se metoda za određivanje mernih karakteristika (dužina, širina, debljina, pravost stranica, odstupanje od pravog ugla, ravnost površine) i kvalitet površine keramičkih pločica.

SRPS ISO 10545-3 Određivanje upijanja vode, prividne poroznosti, prividne relativne zapreminske mase i zapreminske mase – Ovim ispitivanjem se utvrđuje metoda za određivanje upijanja vode i prividne poroznosti keramičkih pločica.

SRPS ISO 10545-4 Određivanje modula loma pri savijanju i čvrstoće pri lomu – Utvrđuje metodu ispitivanja za određivanje čvrstoće pri lomu. Dobijeni podatak ukazuje na opterećenje koju pločica može podneti.

SRPS ISO 10545-7 Određivanje otpornosti glaziranih pločica prema površinskom habanju – PEI klasifikacija – Ocenjuje otpornost glazure prema površinskom habanju. Postupak se vrši rotiranjem sredstva za habanje i ocenjivanjem delovanja habanja, vizuelnim poređenjem pločica izloženih habanju i pločica koje nisu bile izložene habanju. Ocenjivanje proizvoda se vrši od 0 do 5, u zavisnosti od broja obrtaja rotirajućeg sredstva i pojave oštećenja (5 je najviša klasa otpornosti glaziranih pločica prema površinskom habanju).

PEI - klasifikacija glaziranih podnih pločica u odnosu na njihovu otpornost prema habanju.

PEI 0 Glazirane pločice u ovoj klasi ne preporučuju se za korišćenje na podovima.

PEI 1 Prikladno za pokrivanje podnih površina u kojima se hoda isključivo u obući sa mekanim đonovima ili bosonog, bez nečistoća koje grebu podnu površinu (na primer stambena kupatila i spavaće sobe bez direktnog pristupa spolja).

PEI 2 Prikladno za pokrivanje podnih površina u kojima se hoda u mekanoj ili običnoj obući sa uobičajeno malim količinama nečistoće koja grebe površinu (na primer sobe i prostori za dnevni boravak u kućama i stanovima sa izuzetkom kuhinja, ulaza i prostora u kojima je veliki promet).

PEI 3 Prikladno za pokrivanje podnih površina gde se često hoda u običnoj obući sa malo nečistoće koja grebe pod (na primer stambene kuhinje, holovi, hodnici, balkoni, terase). Ne odnosi se na izuzetnu obuću, na primer čizme okovane ekserima.

PEI 4 Prikladno za podove tamno gde se odvija uobičajen promet sa nešto više nečistoće koja grebe pod (na primer ulazi, javne kuhinje, hoteli, izložbeni i prodajni prostori).

PEI 5 Prikladno za podove sa stalnim velikim prohodnim opterećenjem i prisutnom prljavštinom koja grebe (na primer javne površine kao što su trgovački centri, unutrašnje aerodromske prostorije, hotelska predvorja i primena u industriji).

Ova klasifikacija važi za primenu pod uobičajenim uslovima.

Informacija o otpornosti podnih pločica prema habanju navedena je ispod slike podnih pločica.

SRPS ISO 10545-8 Određivanje linearnog termičkog širenja – Određuje se koeficijent linearnog termičkog širenja za opseg od sobne temperature do 100 °C. Vrednost pokazuje u kojoj meri će se postavljena pločica širiti usled temperaturnih promena. Ovaj podatak treba da se uzme u obzir prilikom određivanja debljine fuge između pločica.

SRPS ISO 10545-9 Određivanje otpornosti prema temperaturnom šoku – Pločica se izlaže nagloj promeni temperature i nakon toga se proverava pojava oštećenja.

SRPS ISO 10545-10 Određivanje širenja vlaženjem – Ovim standardom se utvrđuje metoda za određivanje širenja keramičkih pločica vlaženjem. Podatak pomaže prilikom dimenzionisanja fuge između pločica.

SRPS ISO 10545-11 Određivanje otpornosti prema vlasavosti glaziranih pločica – Vršiti se proveru pojave pukotina na površini glazirane pločice nakon tretiranja sa parom na pritisku od 500 kPa i temperaturi od 159 °C, dva sata u autoklavu.

SRPS ISO 10545-12 Određivanje otpornosti prema mrazu – Po ovoj metodi pločice se izlažu smrzavanju i otapanju u temperaturnom opsegu od -5 °C do +5 °C, najmanje 100 ciklusa. Ovo ispitivanje simulira ponašanje proizvoda u spoljašnjim klimatskim uslovima.

SRPS ISO 10545-13 Određivanje otpornosti prema hemikalijama – Ovim ispitivanjem se utvrđuje otpornost pločica prema dejstvu hemikalija za domaćinstvo, soli u vodi bazena za plivanje, kiselina, baza i otpornost prema dejstvu olovke HB tvrdoće. U zavisnosti od vrste hemikalija i otpornosti pločice se dele u sledeće klase:

Hemikalije za domaćinstvo i soli u vodi bazena za plivanje:

- A bez vidljivih efekata
- B male promene u izgledu ili ako pločice nisu prošle test olovke HB tvrdoće
- C značajne promene

Kiseline i baze (malih koncentracija)

- LA bez vidljivih efekata
- LB male promene u izgledu ili ako pločice nisu prošle test olovke HB tvrdoće
- LC značajne promene

Kiseline i baze (velikih koncentracija)

- HA bez vidljivih efekata
- HB male promene u izgledu ili ako pločice nisu prošle test olovke HB tvrdoće
- HC značajne promene

SRPS ISO 10545-14 Određivanje otpornosti prema stvaranju mrlja – Vidna površina pločice se dovodi u kontakt sa sredstvom za stvaranje mrlja, nakon odstranjivanja vrši se klasifikacija. Klasifikacija se vrši od 5 do 1 u zavisnosti od lakoće uklanjanja mrlje, pri čemu se kod klase 5 najlakše uklanja mrlja.

DIN 51130:2004-06 Utvrđivanje karakteristika za sprečavanje klizavosti

Za veće podne površine, industrijske i komercijalne namene poželjno je da je koeficijent trenja viši od onih koji se koristi u kućama.

Nemački standard DIN 51130:2010-10 definiše postupak i služi za testiranje i klasificiranje anti kliznih svojstava podnih obloga koji su predviđeni za korišćenje u radnim prostorima i područjima gde je prisutna opasnost od klizanja. Prihvaćeni ugao se utvrđuje na podnoj oblozi premazanoj sa sredstvom za podmazivanje (ulje) a osoba koja sprovodi kontrolu sa kontrolnim cipelama kreće se napred - nazad po kontrolisanoj podnoj oblozi koja se počinje naginjati od horizontalnog stanja i nagib raste do prihvaćenog ugla tj. ugla pri kom kontrolor dostiže granicu sigurnog hodanja. Prihvaćeni ugao služi za ocenu stepena otpornosti na klizanje

PRIHVAĆENI UGAO	KLASA OTPORNOSTI NA KLIZANJE	PREPORUČUJE SE
6° do 10°	R 9	Ulazi u kuće, dnevni boravak...
10° do 19°	R 10	Hodnici, prodavnice, radionice...
19° do 27°	R 11	Terase, balkoni...
27° do 35°	R 12	Stepeništa, gazišta u vrtu...
Preko 35°	R 13	Oblasti sa specijalnim zahtevima

DIN 51097:02.80 Utvrđivanje karakteristika za sprečavanje klizavosti

U uslovima vlažnosti, na gazištima podnih obloga koje se koriste u kupatilu, svlačionicama, sanitarnim čvorovima i sličnim prostorijama, ocenjuju se karakteristike podnih obloga po ovom standardu.

tokom izvođenja postupka kontinuirano i jednolično se nanosi tečnost na test podnu oblogu koja se počinje naginjati od horizontalnog stanja i nagib raste do prihvaćenog ugla tj. ugla pri kom kontrolor dostiže granicu sigurnog hodanja. Osoba koja sprovodi kontrolu kreće se napred - nazad po kontrolisanoj podnoj oblozi bosih nogu. U zavisnosti od postignutog ugla nagiba test obloge se mogu svrstati u sledeće grupe:

SREDNJA VREDNOST NAGIBA UGLA	KLASA OTPORNOSTI NA KLIZANJE	PREPORUČUJE SE
≥ 12°	A	Kupatila
≥ 18°	B	Svlačionice, sanitarni čvor...
≥ 24°	C	Oblasti sa specijalnim zahtevima

Informacija o otpornosti podnih pločica prema klizanju navedena je pored slike podnih pločica, a odnosi se samo na one pločice koje zadovoljavaju klasu otpornosti na klizanje (na ulje ili vodu).

SRPS U.F2.011 Završni radovi u građevinarstvu – Izvođenje keramičarskih radova – Standard utvrđuje postupak za oblaganje zidova, podova keramičkim pločicama u unutrašnjosti objekta i spolja.

PREPORUKE PRILIKOM UGRADNJE

- Pre ugradnje zidne pločice treba potopiti u vodu radi boljeg prijanjanja za podlogu.
- Shodno standardu SRPS U.F2.011 pločice obavezno postaviti sa fugom. Minimalna fuga za zidne i podne pločice je 3 mm.
- Podloga za postavljanje pločica treba da bude suva (ne sveže malterisana) i bez strukturnih pukotina.
- Prilikom kupovine pločica obavezno obratiti pažnju na oznaku kalibra i nijanse. U jednoj prostoriji postavljati isključivo pločice iste oznake kalibra i nijanse.
- Za digitalan način dekoracije pločica karakterističan je veći broj lica različitog izgleda. Pre postavljanja pločica preporučljivo je slaganje nekoliko m².
- Ukoliko se pločice postavljaju „na smicanje“, preporučuje se smicanje na maksimalno 30% dužine.
- Reklamacije na ugrađene pločice se ne prihvataju, osim reklamacija na skrivene mane proizvoda a odnose se na trajnost pločica po standardu SRPS EN 14411.

GRES PODNE PLOČICE SRPS EN 14411, Grupa B Ia, Prilog G

OSOBINA	METODA ISPITIVANJA	TOLERANCIJA % / MM	
		SRPS EN 14411	KK
Dužina i širina	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Debljina	SRPS ISO 10545-2	± 5,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Odstupanje od pravog ugla	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Ravnost stranica	SRPS ISO 10545-2	± 0,5 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Ravnost površine	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	+ 0,20 % / - 0,1 % / max. (+ 1.5 / -0.5) mm
Kvalitet površine	SRPS ISO 10545-2	Min. 95% bez vidljivog oštećenja	
Upijanje vode	SRPS ISO 10545-3	≤ 0,50 %	< 0,30 %
Čvrstoća pri lomu	SRPS ISO 10545-4	Za deb. ≥ 7.5 mm 1300 N Za deb. < 7.5 mm 700 N	> 1600 N > 1100 N
Modul loma pri savijanju	SRPS ISO 10545-4	> 35 N/mm ² > 32 N/mm ²	> 40 N/mm ²
Otpornost na habanje	SRPS ISO 10545-7	Beleži se klasa habanja i broj ciklusa	Deklarisano od strane proizvođača
Koeficijent linearnog termičkog širenja	SRPS ISO 10545-8	Deklarisana vrednost	7×10 ⁻⁶ K ⁻¹
Otpornost prema temperaturnom šoku	SRPS ISO 10545-9	Zahteva se	Odgovara
Otpornost prema vlasavosti	SRPS ISO 10545-11	Zahteva se	Odgovara
Otpornost prema mrazu	SRPS ISO 10545-12	Zahteva se	Odgovara
Otpornost prema hemikalijama u domaćinstvu	SRPS ISO 10545-13	Najmanje B	A
Otpornost prema stvaranju mrlja	SRPS ISO 10545-14	Najmanje klasa 3	Klasa 5

ZIDNE PLOČICE SRPS EN 14411, Grupa B III, Prilog K

OSOBINA	METODA ISPITIVANJA	TOLERANCIJA % / MM	
		SRPS EN 14411	KK
Dužina i širina	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Debljina	SRPS ISO 10545-2	± 10,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Odstupanje od pravog ugla	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Ravnost stranica	SRPS ISO 10545-2	± 0,3 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Ravnost površine	SRPS ISO 10545-2	+ 0,5 % / - 0,3 % / max. (+ 2.0 / -1.5) mm	+ 0,25 % / - 0,1 % / max. (+ 1.5 / -0.5) mm
Kvalitet površine	SRPS ISO 10545-2	Min. 95% bez vidljivog oštećenja	
Upijanje vode	SRPS ISO 10545-3	> 10,00 %	> 15,00 %
Čvrstoća pri lomu	SRPS ISO 10545-4	Za deb. ≥ 7.5 mm 600 N Za deb. < 7.5 mm 200 N	> 600 N
Modul loma pri savijanju	SRPS ISO 10545-4	> 12 N/mm ² > 15 N/mm ²	> 15 N/mm ²
Koeficijent linearnog termičkog širenja	SRPS ISO 10545-8	Deklarisana vrednost	7×10 ⁻⁶ K ⁻¹
Otpornost prema temperaturnom šoku	SRPS ISO 10545-9	Zahteva se	Odgovara
Otpornost prema vlasavosti	SRPS ISO 10545-11	Zahteva se	Odgovara
Otpornost prema hemikalijama u domaćinstvu	SRPS ISO 10545-13	Najmanje B	A
Otpornost prema stvaranju mrlja	SRPS ISO 10545-14	Najmanja klasa 3	Klasa 5

IDENTIFIKACIJA PROIZVODA NA KUTIJAMA I NA PALETAMA

U procesu automatskog pakovanja keramičke pločice se pakuju u kartonsku ambalažu na koju industrijski štampač štampa osnovne podatke identifikacije proizvoda. Industrijski štampač štampa: datum, ime proizvoda, klasu, nijansu, kalibar proizvoda, identifikacioni kod klasera pločica, šifru i radni nalog proizvoda. Svaka paleta gotovog proizvoda sadrži bar-cod, pomoću koga se pločice identifikuju.

SPECIFIKACIJA PAKOVANJA PLOČICA I UKRASNE GALANTERIJE

⚠ | TEHNIČKE KARAKTERISTIKE SU PODLOŽNE PROMENAMA

PODNE PLOČICE GRUPA B Ia

PAKOVANJE PODNIH PLOČICA	FORMAT	DEBLJINA PLOČICA (MM)	M ² /KOM.	KOMADA PLOČICA U KUTIJI	M ² /KUT.	MASA KUTIJE (KG)	KOMADA KUT.NA PALETI	M ² /PAL.	MASA PALETE (KG)
	33 x 33	7,3	0,1089	16	1,742	26,56	42	73,164	1140,00
	45 x 45	8,2	0,2025	5	1,012	17,55	66	66,792	1180,00
	15 x 60	8,8	0,0900	11	0,990	19,36	56	55,440	1110,00

⚠ | TEHNIČKE KARAKTERISTIKE SU PODLOŽNE PROMENAMA

REKTIFIKOVANE PLOČICE

PAKOVANJE PODNIH PLOČICA	FORMAT	DEBLJINA PLOČICA (MM)	M ² /KOM.	KOMADA PLOČICA U KUTIJI	M ² /KUT.	MASA KUTIJE (KG)	KOMADA KUT.NA PALETI	M ² /PAL.	MASA PALETE (KG)
	29,5 x 59	8,8	0,17405	6	1,044	20,94	48	50,112	1030,00
	59 x 59	9,0	0,3481	4	1,392	26,92	30	41,760	840,00

⚠ | TEHNIČKE KARAKTERISTIKE SU PODLOŽNE PROMENAMA

ZIDNE PLOČICE GRUPE B III

PAKOVANJE ZIDNIH PLOČICA	FORMAT	DEBLJINA PLOČICA (MM)	M ² /KOM.	KOMADA PLOČICA U KUTIJI	M ² /KUT.	MASA KUTIJE (KG)	KOMADA KUT.NA PALETI	M ² /PAL.	MASA PALETE (KG)
	25 x 40	7,4	0,1000	16	1,600	20,16	48	76,80	1000,00
	25 x 50	8,8	0,1250	15	1,875	28,35	36	67,50	1050,00
	20 x 60	9,0	0,1200	13	1,560	23,80	44	68,64	1070,00
	25 x 75	9,2	0,1875	6	1,125	16,80	54	60,75	940,00

UKRASNA GALANTERIJA

PAKOVANJE CENTRALNIH DEKORA I MOZAIKA	FORMAT	KOMADA U KUTIJI	MASA KUTIJE (KG)	KOMADA KUTIJA NA PALETI	MASA PALETE (KG)
	2550C	12	24,198	30	750,00
	5050	6	24,198	30	750,00

PAKOVANJE LISTELA	FORMAT	KOMADA U KUTIJI	MASA KUTIJE (KG)	KOMADA KUTIJA NA PALETI	MASA PALETE (KG)
	450L	22	7,3	60	460,00
	550L	11	4,5	60	290,00
	650L	11	5,4	60	340,00
	750L	11	6,6	60	415,00

TECHNICAL CHARACTERISTICS

„Keramika Kanjiža“ doo from Kanjiža produces dry pressed single fired floor and wall ceramic tiles (so-called monocuttura and monoporosa), as well as decorative accessories. The floor tiles are frost resistant, suitable for installation outside. Our ceramic tiles, in all their segments, meet the requirements of the harmonized European standard SRPS EN 14411.

STANDARDS

Since December 2005, the standard SRPS EN 14411 applies, published with the permission of the European Committee for Standardization CEN. This standard is an identical international standard EN 14411 which is compulsorily applied in all member states of the European Union. The CE-mark is a symbol of product conformity, developed in accordance with the harmonized standard that meets the important requirements of the Construction Products Directive.

Ceramic tiles are classified into quality classes 1,2,3 tested by the following standards:

SRPS EN 14411 Ceramic tiles – Definition, classification, characteristics and designation – Defines terms and determines classifications, characteristics and requirements for designation of ceramic tiles with the best commercial quality (first class).

According to the standard, the ceramic tiles are classified into groups according to the manner of production and water absorption.

SRPS B.D1.330 Ceramic tiles - Classification, characteristics, evaluation and verification of performance constancy and labeling - Defines the classification, characteristics, evaluation of conformity and requirements for marking of ceramic tiles of class 2 and 3.

Classification according to the manner of production:

- Group A Extruded ceramic tiles
- Group B Dry pressed tiles

Classification according to water absorption:

- Group Ia Water absorption less than 0,5%
- Group Ib Water absorption from 0,5 to 3%
- Group IIa Water absorption from 3 to 6%
- Group IIb Water absorption from 6 to 10%
- Group III Water absorption more than 10%

Classification according to the nature of the visible surface:

- Glazed (GL)
- Unglazed (UGL)

The products of “Keramika Kanjiža” are divided into the following groups:

- Floor tiles Group B Ia Attachment G
- Wall tiles Group B III Attachment K

Testing methods used for determination of the product characteristics are described in the standards SRPS ISO 10545.

SRPS ISO 10545-1 Sampling and basis for acceptance – This standard determines the number of samples that should be checked from the series and a maximal number of allowed mistakes.

SRPS ISO 10545-2 Determination of dimensions and quality of visible surface – This standard establishes a method for determining the measurement characteristics (length, width, thickness, flatness of sides, deviation for a right angle, and flatness of the surface) and quality of the surface of ceramic tiles.

SRPS ISO 10545-3 Determination of water absorption, apparent porosity, apparent relative density and bulk density – This testing establishes a method for determination of water absorption and apparent porosity of ceramic tiles.

SRPS ISO 10545-4 Determination of modulus of rupture and fracture strength – Establishes a testing method for determining the fracture strength. Obtained data indicate the load that the tile can bear.

SRPS ISO 10545-7 Determination of surface abrasion resistance of glazed tiles - PEI classification – The glaze resistance to surface abrasion is being determined. The procedure is performed by rotation of assets for abrasion and assessment of the abrasion effect, by visual comparison of tiles exposed to abrasion and tiles which were not exposed to abrasion. The product assessment is performed from 0 to 5, depending on the speed of rotation tools and occurrence of damages (5 is the highest class of resistance of glazed tiles according to the surface abrasion).

PEI – classification of glazed floor tiles in relation to their abrasion resistance

PEI 0 Glazed tiles in this class are not recommended for application on floors.

PEI 1 Appropriate for covering floor surfaces where people walk only in shoes with soft soles or barefoot, without dirt which scratches the floor surface (for example, residential bathrooms and bedrooms without direct access from outside).

PEI 2 Appropriate for covering floor surfaces where people walk in soft or plain shoes, usually with small quantities of dirt which scratches the surface (for example, rooms and living rooms in houses and apartments, with the exception of the kitchen, the doorway and crowded rooms).

PEI 3 Appropriate for covering floor surfaces where people often walk in plain shoes, with little dirt which scratches the floor (for example, residential kitchens, halls, corridors, balconies, terraces). This does not refer to exceptional footwear, for example – studded boots.

PEI 4 Appropriate for floors with normal movement of people with slightly more dirt which scratches the floor (for example entrances, public kitchens, hotels, exhibition and retail space).

PEI 5 Appropriate for floors with constant great natural load and presence of dirt which scratches (for example, public surfaces such as commercial centers, airport interior rooms, hotel lobbies and application in industry).

This classification is valid for application in usual conditions.

The information about abrasive resistance of floor tiles is indicated next to the figures of floor tiles.

SRPS ISO 10545-8 Determination of linear thermal expansion – The coefficient of linear thermal expansion is being determined for a range of room temperature up to 100 °C. The value indicates the extent to which the placed tile will expand due to temperature changes. This information should be taken into consideration during the determination of fugue thickness between the tiles.

SRPS ISO 10545-9 Determination of thermal shock resistance – The tiles are exposed to abrupt temperature changes and afterwards the occurrence of damages is being checked.

SRPS ISO 10545-10 Determination of moisture expansion – This standard establishes a method for determination of moisture expansion of ceramic tiles. The data help to determine the dimension between tiles.

SRPS ISO 10545-11 Determination of crazing resistance of glazed surfaces – Occurrence of cracks on the surface of glazed tiles is performed after treating them with compressed steam at a pressure of 500 kPa and temperature of 159 °C, for two hours in an autoclave.

SRPS ISO 10545-12 Determination of frost resistance – According to this method, the tiles are exposed to freezing and thawing within a temperature range from -5 °C to +5 °C, for at least 100 cycles. This testing simulates the product behavior in external climate conditions.

SRPS ISO 10545-13 Determination of resistance to chemicals – This testing determines the tiles' resistance to the effect of household chemicals, salts in the water of a swimming-pool, acid, base and resistance to the effect of a 'pencil with HB hardness'. Depending on the type of chemicals and resistance of tiles, they are divided in the following classes:

Household chemicals and salts in the water of a swimming-pool

A with no visible effects

B small changes in the appearance or if the tiles did not pass the testing with a 'pencil with HB hardness'

C significant changes

Acids and bases (low concentrations)

LA with no visible effects

LB small changes in the appearance or if the tiles did not pass the testing with a 'pencil with HB hardness'

LC significant changes

Acids and bases (high concentrations)

HA with no visible effects

HB small changes in the appearance or if the tiles did not pass the testing with a 'pencil with HB hardness'

HC significant changes

SRPS ISO 10545-14 Determination of stain resistance – The visible surface of the tiles is exposed to contact with assets that create stains, and classification is performed after removal. The classification is performed from 5 to 1 depending on the ease of removing the stains, whereupon the stains are most easily removed at class 5.

DIN 51130:2004-06 Determination of anti-slip properties for floor tiles

For bigger floor surfaces, industrial and commercial purposes, it is desirable that the friction coefficient is higher than the one used in houses.

The German standard DIN 51130:2010-10 defines the procedure and serves for testing and classification of anti-slip properties of floor coverings which have been stipulated for use in working rooms and areas where danger of slipping exists. The accepted angle is determined on a floor coating with applied lubricated asset (oil) and the person who performs control with control shoes moves forward-backward on the floor coating which is being controlled and which starts to tilt from its horizontal state and the inclination increases up to an accepted angle, i.e. an angle when the controller reaches the boundary of safe walking. The accepted angle is used for assessment of the degree of slip resistance.

ACCEPTED ANGLE:	SLIP RESISTANCE CLASS:	RECOMMENDED IN:
6° do 10°	R 9	House entrances...
10° do 19°	R 10	Shops,workshops...
19° do 27°	R 11	Kitchens, laundry rooms...
27° do 35°	R 12	Great kitchens, dairies...
Over 35°	R 13	Areas with special requirements

DIN 51097:02.80 Determination of characteristics for prevention of slips

The characteristics of floor coatings according to this standard are assessed in conditions of moisture, on the treads of floor coverings which are used in bathrooms, changing rooms, toilets and similar rooms.

During the execution of the procedure, a liquid is continuously and uniformly applied for testing the floor covering which will start to tilt from its horizontal position and the inclination will grow up to an accepted angle, i.e. an angle when the controller reaches the boundary of safe walking. The person who performs control moves forward-backward on the floor coating which is being controlled, barefoot. Depending on the achieved inclination angle, the tested coverings could be classified in the following groups:

MEAN VALUE OF ANGLE:	SLIP RESISTANCE CLASS:	RECOMMENDED IN:
≥ 12°	A	Bathrooms...
≥ 18°	B	Changing rooms, toilet...
≥ 24°	C	Areas with special requirements

The information about slip resistance of floor tiles is indicated next to the figures of floor tiles. Refers only to tiles that meet the slip resistance class (oil or water).

SRPS U.F2.011 Finishing works in structural engineering – Execution of ceramic works – The standard determines a procedure for wall and floor cladding with ceramic tiles inside of premises, as well as outside.

RECOMMENDATIONS DURING INSTALLATION

- Before installing wall tiles, they need to be immersed in water for better adhesion with the substrate.
- According to the standard SRPS U.F2.011, the tiles must compulsorily be placed with a fugue. The minimal fugue for wall and floor tiles is 3 mm,
- The substrate for placing the tiles should be dry (not freshly plastered) and without structural cracks.
- When buying the tiles, you must compulsorily pay attention to the designation of the caliber and the shade. Tiles with the same designations of caliber and shade should be put exceptionally in the same room.
- The digital mode of tile decoration is characterized by a larger number of faces with different appearance. Before final laying, it is recommendable to place few square meters of tiles to get a visual impression.
- When laying tiles with offset, the recommendation is that maximum offset is 30% of the length.
- After installation of tiles, claim is not possible, except for complaints about the hidden defects of the products, which are related to the durability of the tiles by standard SRPS EN 14411.
- Industrial printer is printing: date, name of the product, class, shade, caliber of the product, id code of the classer for the tile, code and work sheet of product

FLOOR TILES – SRPS EN 14411, Group B Ia, Annex G

TECHNICAL CHARACTERISTICS	NORMS	TOLERANCE % / MM	
		SRPS EN 14411	KK
Length and width	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Thickness	SRPS ISO 10545-2	± 5,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Rectangularity	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Straightness of sides	SRPS ISO 10545-2	± 0,5 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Surface flatness	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	+ 0,20 % / - 0,1 % / max. (+ 1.5 / -0.5) mm
Appearance	SRPS ISO 10545-2	Min. 95% without visible defects	
Water absorption	SRPS ISO 10545-3	≤ 0,50 %	< 0,30 %
Breaking strength	SRPS ISO 10545-4	Thick. ≥ 7.5 mm 1300 N Thick. < 7.5 mm 700 N	> 1600 N > 1100 N
Modulus of rupture (bending strength)	SRPS ISO 10545-4	> 35 N/mm ² > 32 N/mm ²	> 40 N/mm ²
Wear resistance	SRPS ISO 10545-7	The abrasion class and number of cycles are recorded.	Declared by the manufacturer
Coefficient of linear thermal expansion	SRPS ISO 10545-8	Declared value	7×10 ⁻⁶ K ⁻¹
Resistance to thermal shock	SRPS ISO 10545-9	Declared value	Conforms
Crazing resistance	SRPS ISO 10545-11	Declared value	Conforms
Frost resistance	SRPS ISO 10545-12	Declared value	Conforms
Resistance to chemical products for domestic use	SRPS ISO 10545-13	Minimum B	A
Resistance to stains	SRPS ISO 10545-14	Minimum Class 3	Class 5

WALL TILES – SRPS EN 14411, Group B III, Annex K

TECHNICAL CHARACTERISTICS	NORMS	TOLERANCE % / MM	
		SRPS EN 14411	KK
Length and width	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Thickness	SRPS ISO 10545-2	± 10,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Rectangularity	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Straightness of sides	SRPS ISO 10545-2	± 0,3 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Surface flatness	SRPS ISO 10545-2	+ 0,5 % / - 0,3 % / max. (+ 2.0 / -1.5) mm	+ 0,25 % / - 0,1 % / max. (+ 1.5 / -0.5) mm
Appearance	SRPS ISO 10545-2	Min. 95% without visible defects	
Water absorption	SRPS ISO 10545-3	> 10,00 %	> 15,00 %
Breaking strength	SRPS ISO 10545-4	Thick. ≥ 7.5 mm 600 N Thick. < 7.5 mm 200 N	> 600 N
Modulus of rupture (bending strength)	SRPS ISO 10545-4	> 12 N/mm ² > 15 N/mm ²	> 15 N/mm ²
Coefficient of linear thermal expansion	SRPS ISO 10545-8	Declared value	7×10 ⁻⁶ K ⁻¹
Resistance to thermal shock	SRPS ISO 10545-9	Declared value	Conforms
Crazing resistance	SRPS ISO 10545-11	Declared value	Conforms
Resistance to chemical products for domestic use	SRPS ISO 10545-13	Minimum B	A
Resistance to stains	SRPS ISO 10545-14	Minimum Class 3	Class 5

IDENTIFICATION OF PRODUCTS ON BOXES AND ON PALLETS

In the process of automatic packaging, the ceramic tiles are packed in a cardboard boxes in which the industrial printer prints the basic data for identifying the product.

The first printed line contains: date, identification number of the classifier and product name. The second printed line contains: number of work order, product code, product class, product shade and caliber, that is, dimension of the floor tiles:

Each palette of finished product contains a barcode, which helps to identify the tiles.

CONDITIONS OF TILE AND DECOR PACKAGINGS

 | THE TECHNICAL CHARACTERISTICS OF THE PACKAGING ARE SUBJECT TO CHANGE

FLOOR TILES GROUP B Ia

PACKAGING OF FLOOR TILES	FORMAT	THICKNESS OF TILE (MM)	M ² / PC	TILE/ BOX	M ² / BOX	WEIGHT OF BOX (KG)	BOX/ PALLET	M ² / PALLET	WEIGHT OF PALL. (KG)
	33 x 33	7,3	0,1089	16	1,742	26,56	42	73,164	1140,00
	45 x 45	8,2	0,2025	5	1,012	17,55	66	66,792	1180,00
	15 x 60	8,8	0,0900	11	0,990	19,36	56	55,440	1110,00

 | THE TECHNICAL CHARACTERISTICS OF THE PACKAGING ARE SUBJECT TO CHANGE

RECTIFIED TILES

PACKAGING OF WALL TILES	FORMAT	THICKNESS OF TILE (MM)	M ² / PC	TILE/ BOX	M ² / BOX	WEIGHT OF BOX (KG)	BOX/ PALLET	M ² / PALLET	WEIGHT OF PALL. (KG)
	29,5 x 59	8,8	0,17405	6	1,044	20,94	48	50,112	1030,00
	59 x 59	9,0	0,3481	4	1,392	26,92	30	41,760	840,00

 | THE TECHNICAL CHARACTERISTICS OF THE PACKAGING ARE SUBJECT TO CHANGE









WALL TILES GROUP B III

PACKAGING OF WALL TILES	FORMAT	THICKNESS OF TILE (MM)	M ² / PC	TILE/ BOX	M ² / BOX	WEIGHT OF BOX (KG)	BOX/ PALLET	M ² / PALLET	WEIGHT OF PALL. (KG)
	25 x 40	7,4	0,1000	16	1,600	20,16	48	76,80	1000,00
	25 x 50	8,8	0,1250	15	1,875	28,35	36	67,50	1050,00
	20 x 60	9,0	0,1200	13	1,560	23,80	44	68,64	1070,00
	25 x 75	9,2	0,1875	6	1,125	16,80	54	60,75	940,00


CERAMIC DECORS

PACKAGING OF CENTRAL DECORS	FORMAT	TILE/ BOX	WEIGHT OF BOX (KG)	BOX/PALLET	WEIGHT OF PALLET (KG)
	2550C	12	24,198	30	750,00
	5050	6	24,198	30	750,00

PACKAGING OF DECORS	FORMAT	TILE/ BOX	WEIGHT OF BOX (KG)	BOX/PALLET	WEIGHT OF PALLET (KG)
	450L	22	7,3	60	460,00
	550L	11	4,5	60	290,00
	650L	11	5,4	60	340,00
	750L	11	6,6	60	415,00

	Zidne pločice Wall tiles		Otpornost na niske temperature Low temperature resistance	PEI 3	Otpornost na habanje Resistance to abrasion
	Podne pločice Floor tiles		Otpornost na hemikalije u domaćinstvu Resistance to household chemicals		Otpornost na mrlje Stain resistance
M	Mat površina Matte surface		Protivkliznost površine (voda) Anti-slip (water)		Broj lica Number of faces
S	Sjajna površina Glossy surface		Protivkliznost površine (ulje) Anti-slip (oil)		



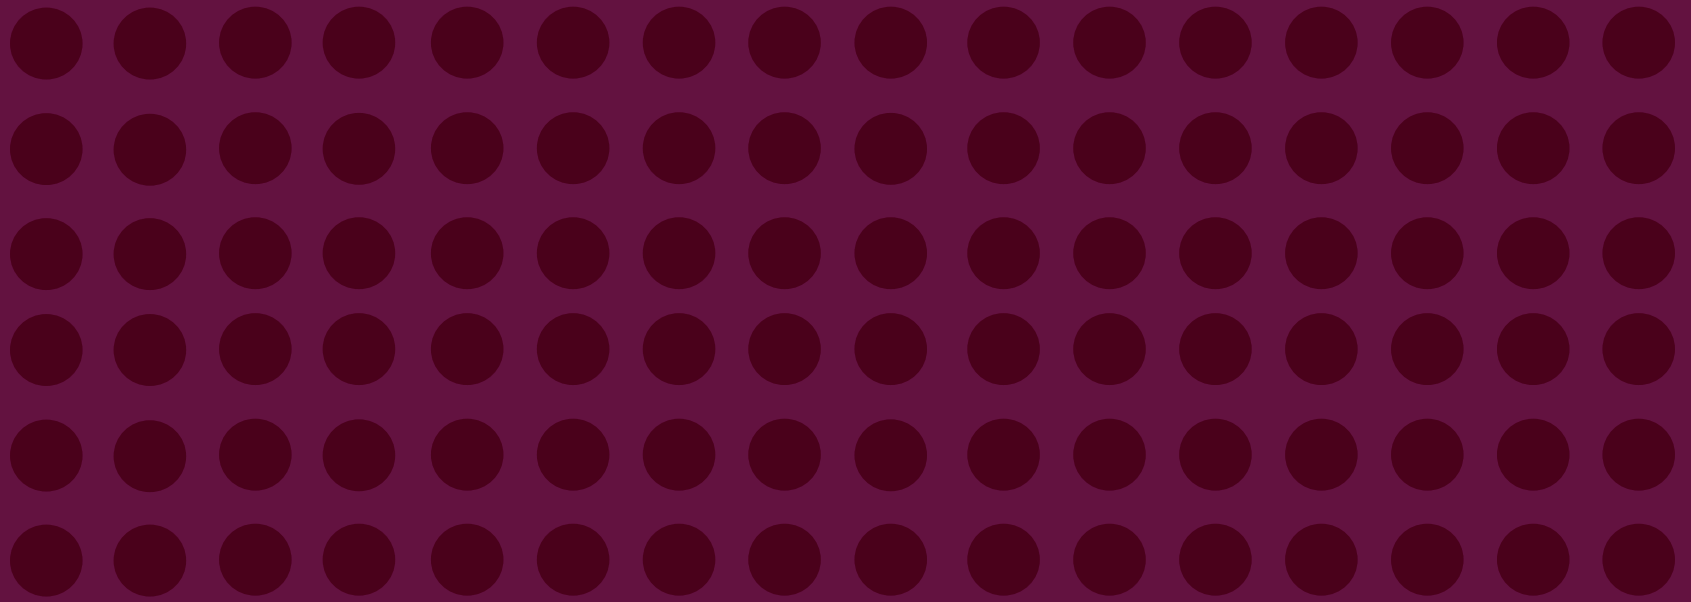

Horgoški put bb.
24420 Kanjiža | Srbija
+ 381 24 874 211
+ 381 24 873 344
keramikakanjiza.com